


# PRODUCT DATA SHEET

U-reinforcing profile C3-C5M universal+  
U 100-20  
Item no. 59021



Status: 09.09.2026 | 15:28

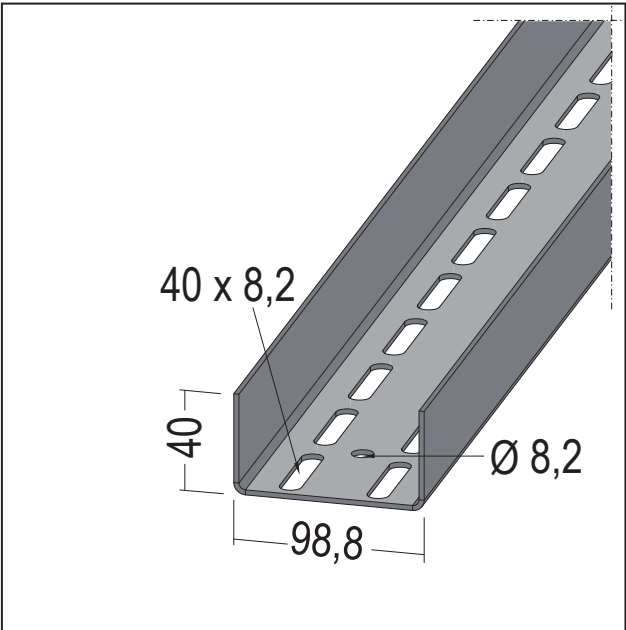

|                          |                                                                                                                                                                |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Designation              | U-reinforcing profile C3-C5M universal+ U 100-20                                                                                                               |
| Description              | Application area: walls/wall faces, especially in door areas, or support profiles for free-spanning ceilings with increased corrosion resistance requirements. |
| Product area             | Dry lining                                                                                                                                                     |
| Product category         | Anti corrosion defendo                                                                                                                                         |
| Material thickness       | 2 mm                                                                                                                                                           |
| Standard EN              | EN 14195:2005/AC:2006                                                                                                                                          |
| Standard                 | DIN18182-1                                                                                                                                                     |
| Galvanizing              | tested to standard                                                                                                                                             |
| Product width            | 98,8 mm                                                                                                                                                        |
| Standard coating profile | DIN 18219:2024                                                                                                                                                 |
| Product height in mm     | 40 mm                                                                                                                                                          |
| Reaction to fire (R2F)   | A2-s1, d0                                                                                                                                                      |
| Overplastering Ability   | Corrosion protection certification in accordance with DIN EN ISO 12944 Part 6, June 2018 edition. Condensation test 720 h and salt spray test 720 h passed.    |
| Annotation               | Nachweis Korrosionsschutz nach DIN EN ISO 12944 Teil 6, Ausgabe Juni 2018. Kondensatprüfung 720 h und Salzsprühnebeltest 1.440 h bestanden.                    |
| Customs tariff number    | 73089059                                                                                                                                                       |
| Opened label             | Purchase only possible as full packaging units.                                                                                                                |

| Item number | Length (cm) | Material                      | Packaging unit |
|-------------|-------------|-------------------------------|----------------|
| 109679      | 300.00      | Galvanised steel with coating | 4 PCS / 15 BUN |
| 110512      | 350.00      | Galvanised steel with coating | 4 PCS / 15 BUN |
| 109680      | 400.00      | Galvanised steel with coating | 4 PCS / 15 BUN |
| 110513      | 450.00      | Galvanised steel with coating | 4 PCS / 15 BUN |
| 114736      | 500.00      | Galvanised steel with coating | 4 PCS / 15 BUN |

# PRODUCT DATA SHEET

U-reinforcing profile C3-C5M universal+

U 100-20

Item no. 59021



This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!