


PRODUCT DATA SHEET

U-reinforcing profile C3-C5M universal+
U 150-20
Item no. 59023



Status: 09.09.2026 | 15:26

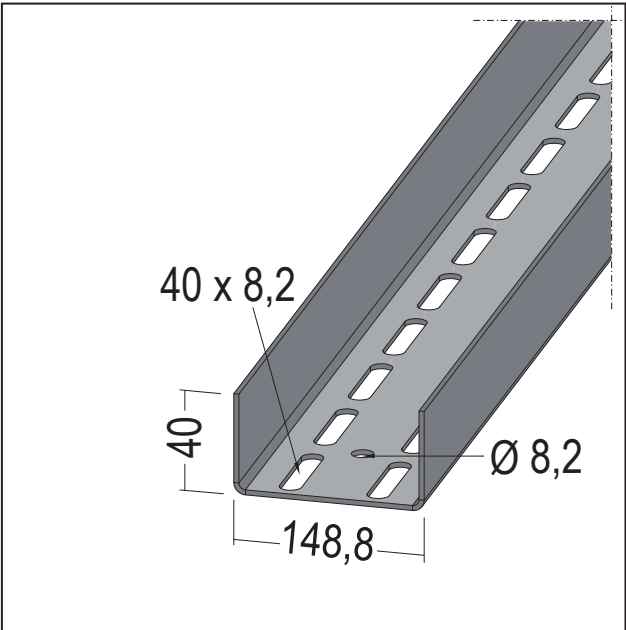

Designation	U-reinforcing profile C3-C5M universal+ U 150-20
Description	Application area: walls/wall faces, especially in door areas, or support profiles for free-spanning ceilings with increased corrosion resistance requirements.
Product area	Dry lining
Product category	Anti corrosion defendo
Material thickness	2 mm
Standard EN	EN 14195:2005/AC:2006
Standard	DIN18182-1
Galvanizing	tested to standard
Product width	148,8 mm
Standard coating profile	DIN 18219:2024
Product height in mm	40 mm
Reaction to fire (R2F)	A2-s1, d0
Overplastering Ability	Corrosion protection certification according to DIN EN ISO 12944 Part 6, June 2018 edition. Condensation test 720 hours and salt spray test 1,440 hours passed.
Annotation	Nachweis Korrosionsschutz nach DIN EN ISO 12944 Teil 6, Ausgabe Juni 2018. Kondensatprüfung 720 h und Salzsprühnebeltest 1.440 h bestanden.
Customs tariff number	73089059
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
115813	400.00	Galvanised steel with coating	2 PCS / 24 BUN
115814	600.00	Galvanised steel with coating	2 PCS / 24 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

PRODUCT DATA SHEET

U-reinforcing profile C3-C5M universal+

U 150-20

Item no. 59023



All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!