


PRODUCT DATA SHEET

Double spring with special spring
Item no. 6004



Status: 01.09.2026 | 20:55

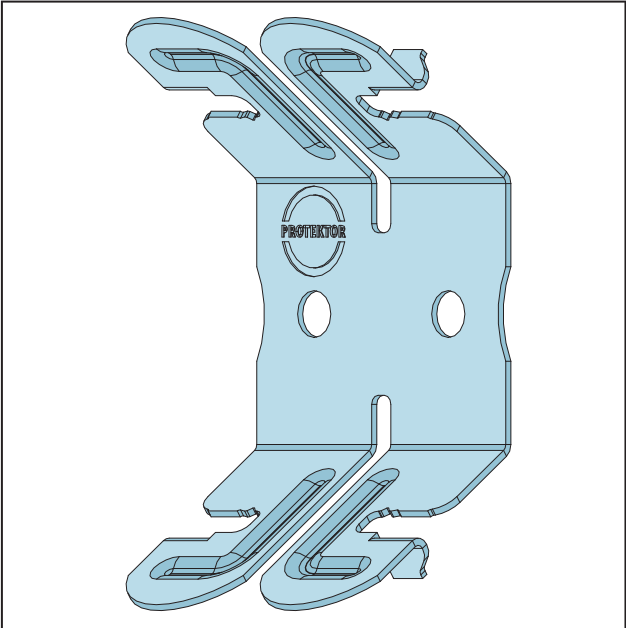

Designation	Double spring with special spring
Description	For extending hooks/eyelet wires on ceiling sub-constructions. Quick assembly facilitated by lateral wire insertion.
Product area	Dry lining
Product category	Standard accessoires
Material thickness	0,75 mm
Standard EN	EN 13964:2014
Standard	DIN18168-2
Galvanizing	tested to standard
Capacity class	0,40 kN
Reaction to fire (R2F)	A1
Treatment	- Attach the eyelet wire at the required centre distance using suitable fasteners. - Insert the upper eyelet wire on one side of the double spring until it clicks into place. - To extend, insert the second eyelet or hook wire sideways until it engages - Readjust if necessary
Load bearing capacity	0,400 kN
Customs tariff number	73089059
Processing instructions	See processing description.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
115797	0.00	Spring steel, galvanized	100 PCE / 120 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!