


PRODUCT DATA SHEET

Tension spring with suspension wire
200 mm
Item no. 6008



Status: 31.07.2026 | 13:04

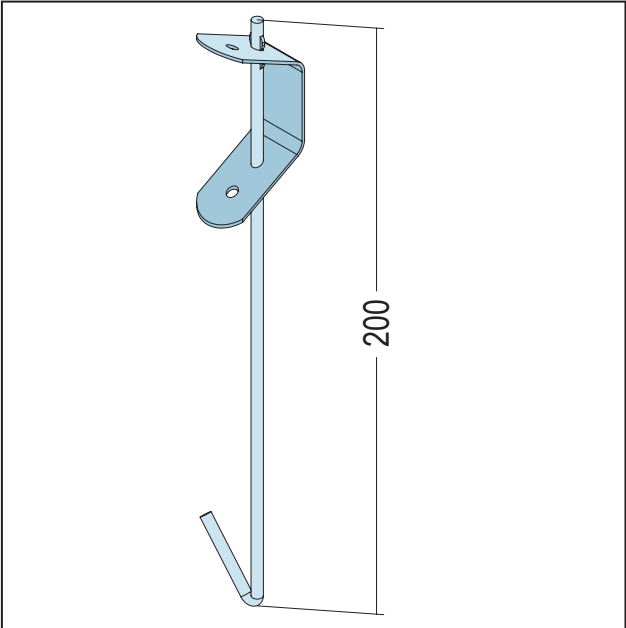

Designation	Tension spring with suspension wire 200 mm
Description	For mounting ceiling sub-constructions.
Product area	Dry lining
Product category	Standard accessoires
Standard EN	EN 13964:2014
Standard	DIN18168-2
Galvanizing	tested to standard
Capacity class	0,25 kN
Reaction to fire (R2F)	A1
Treatment	- Attach the eyelet wire at the required centre distance using suitable fasteners. - Compress the spring and push the eyelet wire through the two holes from above. - Hook the profile into the hook and bend it until it is closed - Readjust if necessary
Load bearing capacity	250 N
Customs tariff number	73089098
Processing instructions	See processing description.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
101028	20.00	Steel wire, galvanized / Spring steel	100 PCE / 96 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general. Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!