


PRODUCT DATA SHEET

Nonius hanger
for U-50-20
Item no. 6013



Status: 31.07.2026 | 13:00

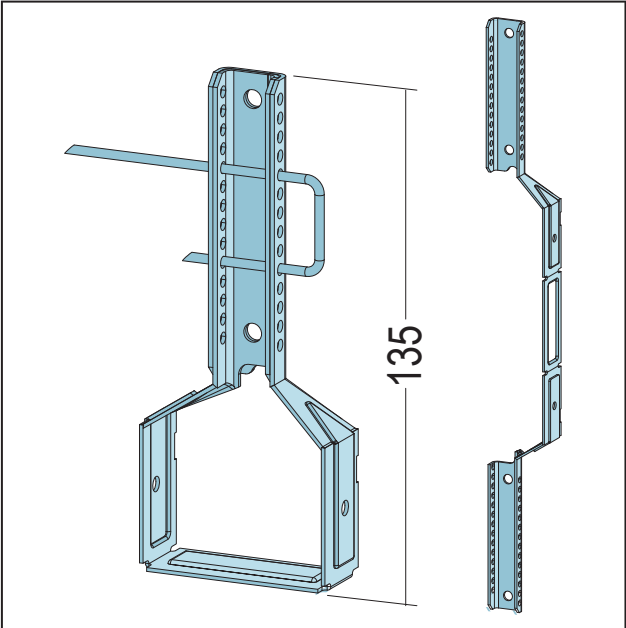

Designation	Nonius hanger for U-50-20
Description	For attaching UA profiles on ceiling sub-constructions with no vernier suspensions, including fixing clip.
Product area	Dry lining
Product category	Standard accessoires
Material thickness	1 mm
Standard EN	EN 13964:2014
Standard	DIN18168-2
Galvanizing	tested to standard
Capacity class	0,40 kN
Reaction to fire (R2F)	A1
Treatment	- Bend the Nonius bracket around the UA-50 profile and clip in the tabs. - Connect the Nonius bow to the Nonius upper part using two safety clips or a safety clip. - Depending on the requirements, screw the Nonius bracket to the profile with suitable screws. - Readjust if necessary - After aligning the substructure, secure the securing bracket by bending it over.
Load bearing capacity	400 N
Customs tariff number	73089059
Processing instructions	See processing description.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
101070	31.00	Galvanised steel	100 PCE / 32 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

PRODUCT DATA SHEET

Nonius hanger
for U-50-20
Item no. 6013



All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!