



PRODUCT DATA SHEET

Nonius bar
Item no. 6031

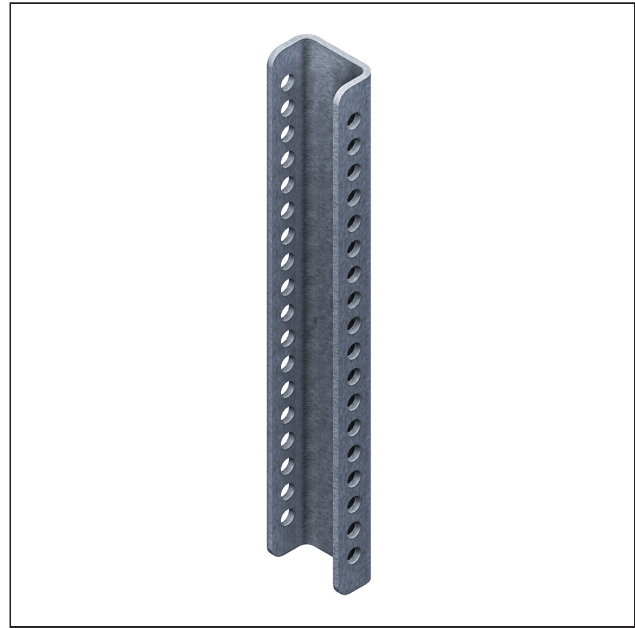

Status: 11.04.2024 | 01:04

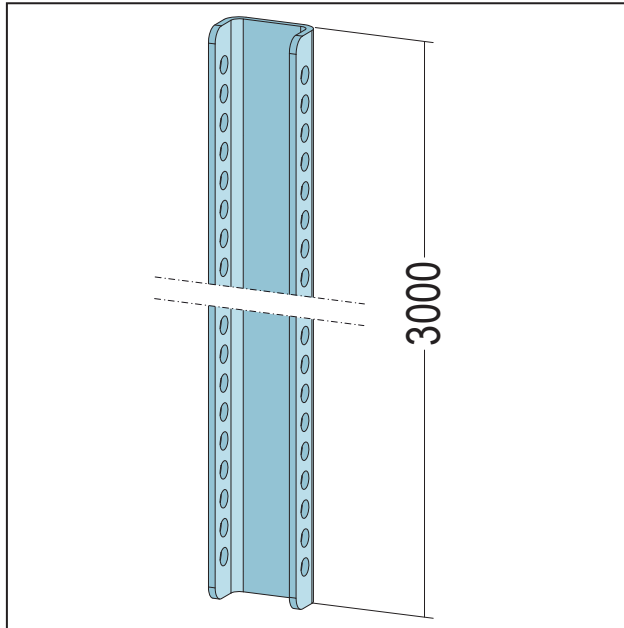

Designation	Nonius bar
Description	For mounting onto ceiling sub-constructions to extend vernier suspensions.
Product area	Dry lining / lightweight steel construction
Product category	Standard accessoires
Material	Galvanised steel
Material thickness	1 mm
Standard EN	EN 13964:2014
Galvanizing	tested to standard
Product length	300 cm
Reaction to fire (R2F)	A1
Treatment	- Shorten the nonius bar to the required length - Attach the Nonius rod to the Nonius upper part using a connector with 4 securing clips or a securing bracket. - Connect the Nonius lower part to the Nonius rod with two safety clamps or a safety clip. - After aligning the substructure, secure the securing bracket by bending it over.
Packaging Unit	20 PC / 15 BUN
Load bearing capacity	NDP*
Processing instructions	see processing description

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!