



PRODUCT DATA SHEET

Nonius bar for extension
Item no. 6031

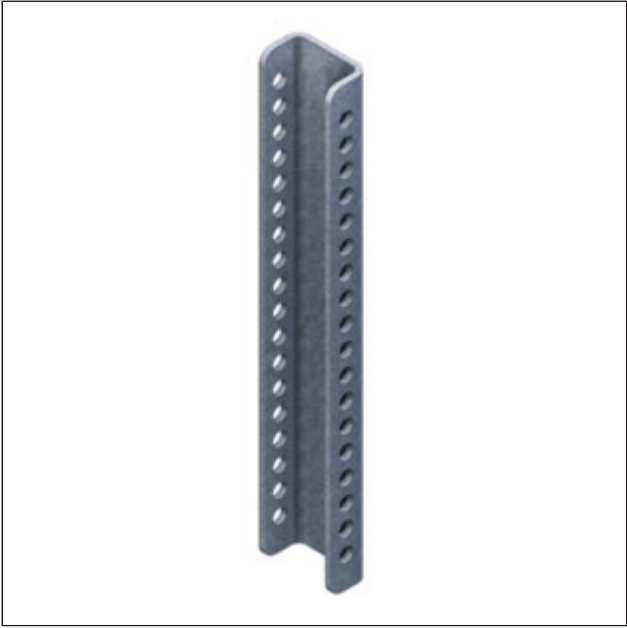

Status: 19.08.2026 | 06:46

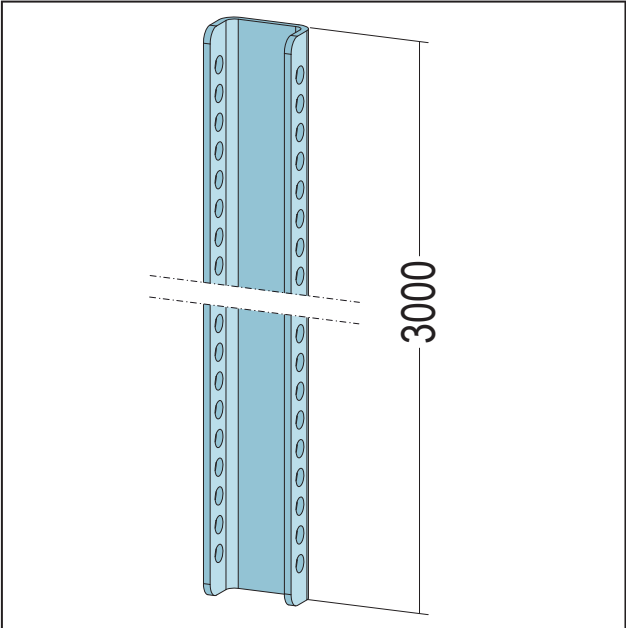

Designation	Nonius bar for extension
Description	For mounting onto ceiling sub-constructions to extend vernier suspensions.
Product area	Dry lining
Product category	Standard accessoires
Material thickness	1 mm
Standard EN	EN 13964:2014
Standard	DIN18168-2
Galvanizing	tested to standard
Reaction to fire (R2F)	A1
Treatment	- Shorten the nonius bar to the required length - Attach the Nonius rod to the Nonius upper part using a connector with 4 securing clips or a securing bracket. - Connect the Nonius lower part to the Nonius rod with two safety clamps or a safety clip. - After aligning the substructure, secure the securing bracket by bending it over.
Load bearing capacity	NPD*
Customs tariff number	73089098
Processing instructions	See processing description.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
109824	300.00	Galvanised steel	20 PCE / 15 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general. Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!