

# PRODUCT DATA SHEET



Suspension wire with hook

125 mm

Item no. 6051



Status: 11.04.2024 | 01:04

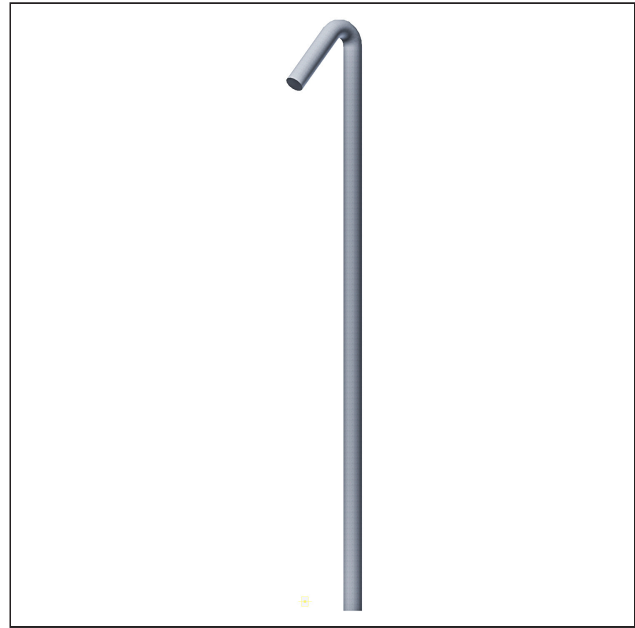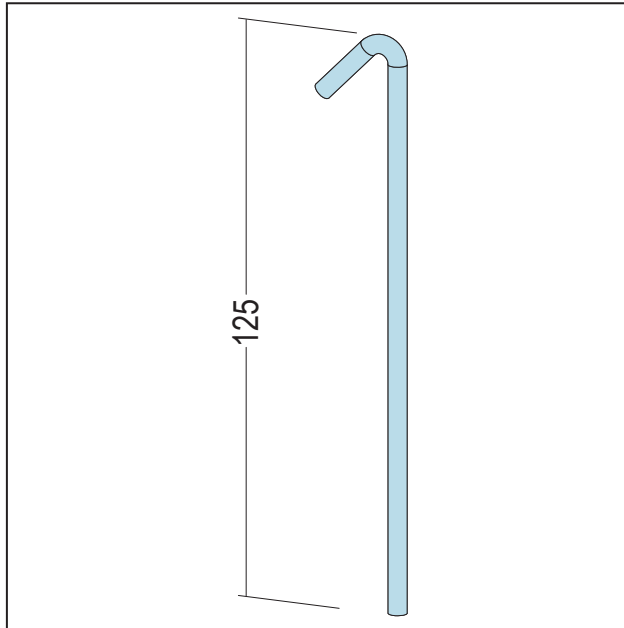

<b>Designation</b>	Suspension wire with hook 125 mm
<b>Description</b>	Application area: ceiling sub-constructions connected to suspension hangers.
<b>Product area</b>	Dry lining / lightweight steel construction
<b>Product category</b>	Standard accessoires
<b>Material</b>	Steel wire, galvanised
<b>Material thickness</b>	4 mm
<b>Standard EN</b>	EN 13964:2014
<b>Standard</b>	DIN18168-1
<b>Galvanizing</b>	tested to standard
<b>Product length</b>	12 cm
<b>Reaction to fire (R2F)</b>	A1
<b>Treatment</b>	- Attach the suspension wire at the required centre distance using suitable fasteners. - Connect the suspension wire with the hook on the eyelet wire using a double spring. - Fix T-support rail into the suspension wire with hooks - To avoid unintentional unhooking of the T-rail, the hook wires should be pressed together after assembly. - Readjust if necessary
<b>Packaging Unit</b>	100 PC / 200 BOX
<b>Load bearing capacity</b>	NPD*
<b>Processing instructions</b>	see processing description

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!