


PRODUCT DATA SHEET

Suspension wire with hook
1000 mm
Item no. 6056



Status: 31.07.2026 | 11:19

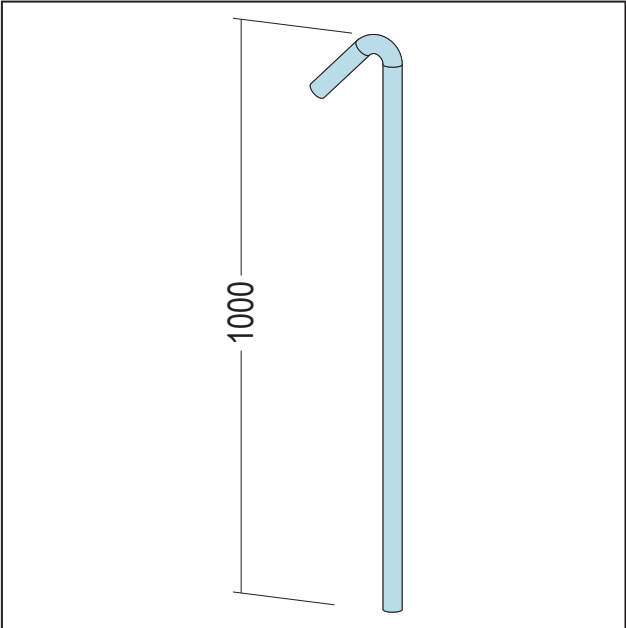

Designation	Suspension wire with hook 1000 mm
Description	Application area: ceiling sub-constructions connected to suspension hangers.
Product area	Dry lining
Product category	Standard accessoires
Material thickness	4 mm
Standard EN	EN 13964:2014
Standard	DIN18168-1
Galvanizing	tested to standard
Reaction to fire (R2F)	A1
Treatment	- Attach the suspension wire at the required centre distance using suitable fasteners. - Connect the suspension wire with the hook on the eyelet wire using a double spring. - Fix T-support rail into the suspension wire with hooks - To avoid unintentional unhooking of the T-rail, the hook wires should be pressed together after assembly. - Readjust if necessary
Load bearing capacity	NPD*
Customs tariff number	73262000
Processing instructions	See processing description.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
101168	100.00	Steel wire, galvanised	100 PCE / 50 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!