


PRODUCT DATA SHEET

Suspension wire with eyelet
2500 mm
Item no. 6062



Status: 08.09.2026 | 07:20

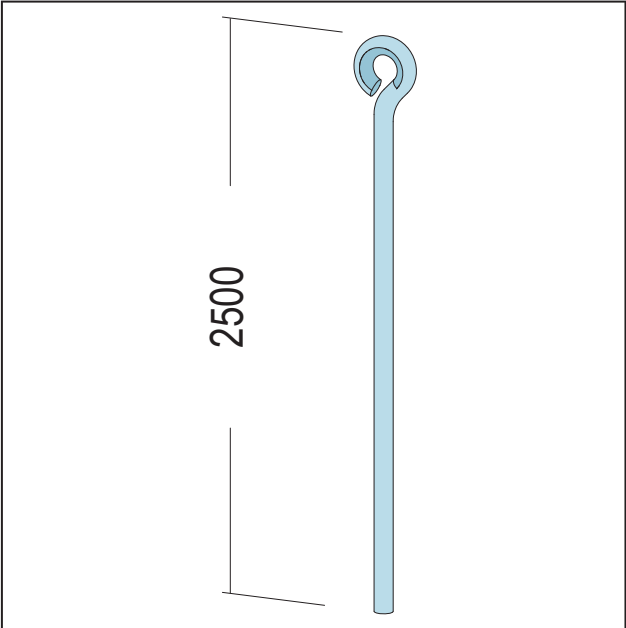

Designation	Suspension wire with eyelet 2500 mm
Description	Application area: ceiling sub-constructions connected to suspension hangers. Eyelet Ø 6 mm
Product area	Dry lining
Product category	Standard accessoires
Material thickness	4 mm
Standard EN	EN 13964:2014
Standard	DIN18168-1
Galvanizing	tested to standard
Capacity class	k.A.
Reaction to fire (R2F)	A1
Treatment	- Attach the eyelet wire at the required centre distance using suitable fasteners.
Overplastering Ability	Tested in accordance with EN 13964 and DIN 18168/2
Load bearing capacity	NPD
Annotation	Tested in accordance with EN 13964 and DIN 18168/2
Customs tariff number	73262000
Processing instructions	See processing description.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
111346	250.00	Steel wire, galvanised	100 PCE / 50 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

PRODUCT DATA SHEET

Suspension wire with eyelet

2500 mm

Item no. 6062



All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!