


PRODUCT DATA SHEET

Quick install clip
for CD 60-27
Item no. 6092



Status: 31.07.2026 | 11:12

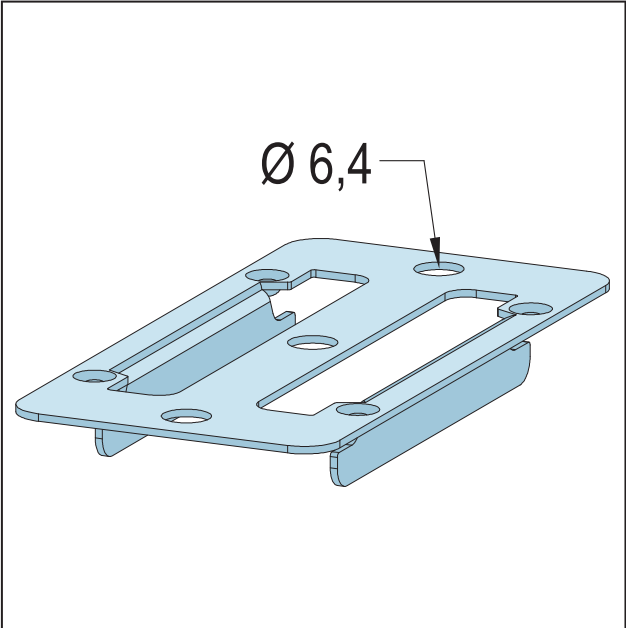

Designation	Quick install clip for CD 60-27
Description	For directly attaching CD profiles on hanging ceiling sub-constructions.
Product area	Dry lining
Product category	Standard accessoires
Material thickness	1 mm
Standard EN	EN 13964:2014
Standard	DIN18168-2
Galvanizing	tested to standard
Capacity class	0,40 kN
Reaction to fire (R2F)	A1
Treatment	- The alignment of the direct mounting clip is done according to the cord strike/laser - Install the direct mounting clip - Clip in ceiling profiles. - Alternatively, the direct mounting clip can be clipped directly into the ceiling profile and mounted through the two side holes by means of suitable fasteners
Load bearing capacity	400 N
Customs tariff number	73089059
Processing instructions	See processing description.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
111373	0.00	Galvanised steel	100 PCE / 120 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!