



PRODUCT DATA SHEET

CD safety cross connector
for C 60-27
Item no. 6116

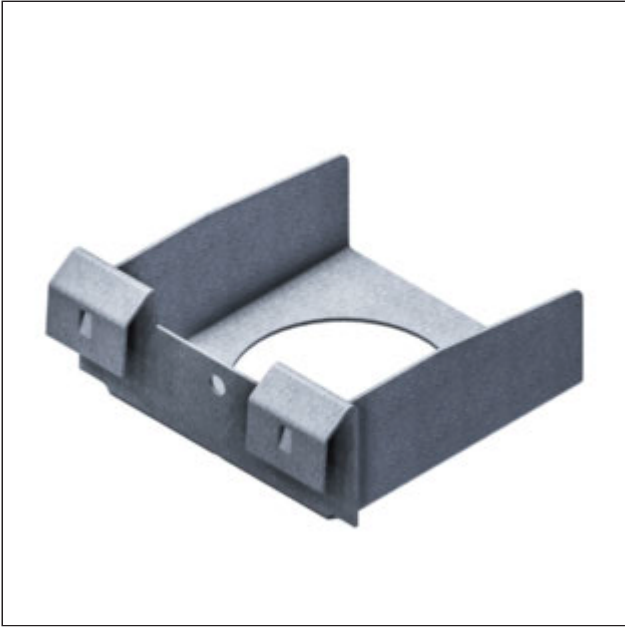

Status: 01.09.2026 | 07:55

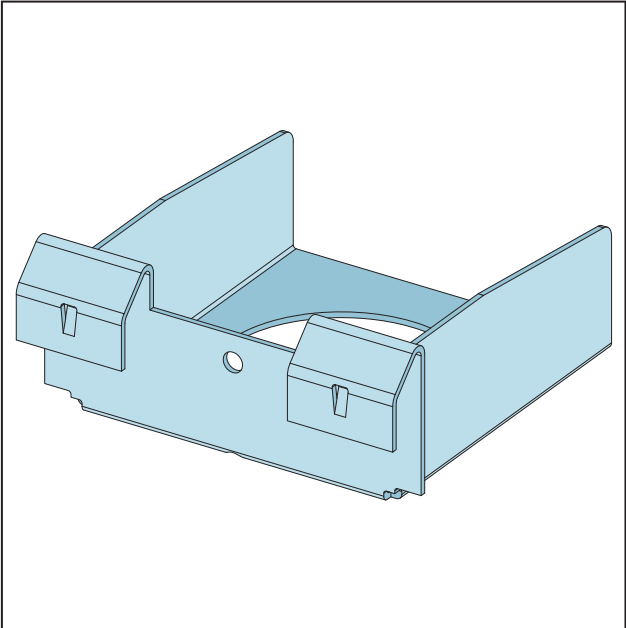

Designation	CD safety cross connector for C 60-27
Description	For connecting CD profiles on ceiling sub-constructions.
Product area	Dry lining
Product category	Standard accessoires
Material thickness	0,8 mm
Standard EN	EN 13964:2014
Standard	DIN18168-2
Galvanizing	tested to standard
Capacity class	0,40 kN/Paar
Reaction to fire (R2F)	A1
Treatment	- Slide the safety cross connector into the ceiling cross profiles and clip it audibly into the ceiling support profiles at the specified distance.
Load bearing capacity	0,400 kN/P
Customs tariff number	73089059
Processing instructions	See processing description.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
107925	0.00	Galvanised steel	100 PCE / 45 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!