


PRODUCT DATA SHEET

"LED rail ""sunset"""
2000 mm
Item no. 6518



Status: 02.08.2026 | 01:20

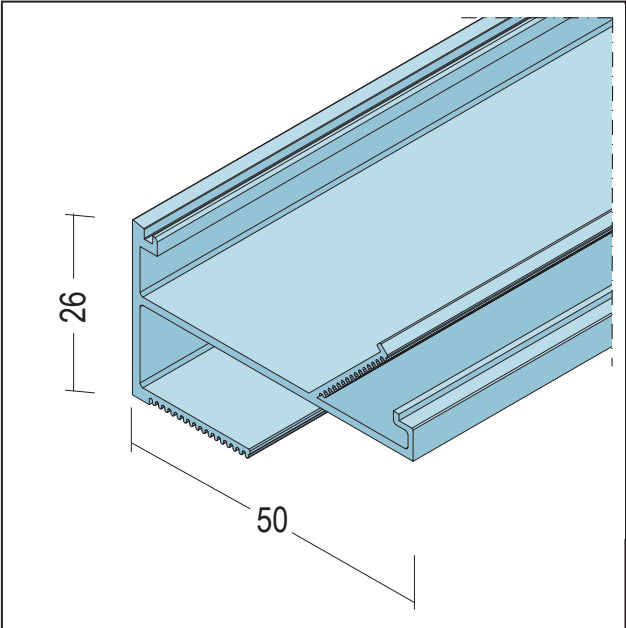

Designation	"LED rail ""sunset"" 2000 mm
Description	For creating shadow joints.Suitable for LED strips with max. width 18 mm and max. 30 watts/m. LED profile Lumino without LED strip. For panel thickness 12.5 mm.
Product area	Dry lining
Product category	LED Lightdesign - lumino
GK/Plate	12,5 mm
Material thickness	1,5 mm
Reaction to fire (R2F)	A1
Customs tariff number	76042910
Processing instructions	Filling may only be carried out when no major changes in the length of the panel material are to be expected, e.g. as a result of temperature or moisture changes. Please observe the information in BVG leaflet no. 1 "Construction site conditions". Expansion joints should be made every 4 m (joint width 2 mm <15W LED power/m or 4 mm >15W LED power/m). Chamfer the ends of the profiles. Depending on the product, the LED protective tube with article no. 6547 should be used. Roughen the filling surfaces of the profiles (anodised or powder-coated) before filling. The levelling surfaces of the profiles must also be cleaned before levelling. A reinforcement strip must be used when filling. The respective manufacturer's instructions and standards for the products used must be observed. Degrease the profile with spirit, for example, before painting. The LED technology may only be installed by specialised personnel. The manufacturer's instructions on handling, installation, etc. must be observed and complied with.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
118332	200.00	Aluminum	4 PCE / 150 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general. Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!