


PRODUCT DATA SHEET

Flexible LED Profile
2000 mm
Item no. 6544



Status: 02.08.2026 | 12:56

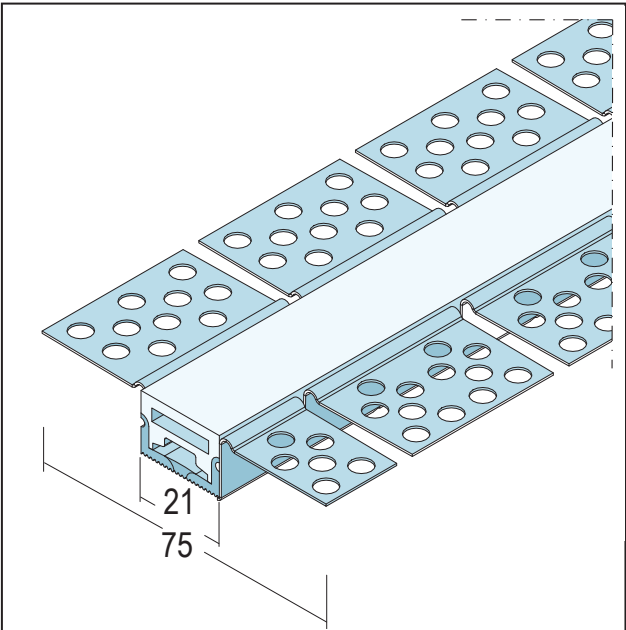

Designation	Flexible LED Profile 2000 mm
Description	Flexible surface profile with integrated silicone tube for holding LED strips. Suitable for LED strips with a max. width of 10 mm and max. 15 watts/m. Light sources are not included in the scope of delivery. Minimum panel thickness 12.5 mm
Product area	Dry lining
Product category	LED Lightdesign - lumino
Material thickness	0,6 mm
Reaction to fire (R2F)	A1
Overplastering Ability	Please observe mounting instructions
Annotation	Please observe mounting instructions
Customs tariff number	72166190
Processing instructions	The LED tube goes into the bottom opening. The flexible LED tube can be used in reverse (underside facing upwards) as spatula protection.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
120301	200.00	Galvanised steel	2 PCE / 60 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!