



# PRODUCT DATA SHEET

Movement joint bead for interior and exterior plaster  
from 14 mm, surface area  
Item no. 7503

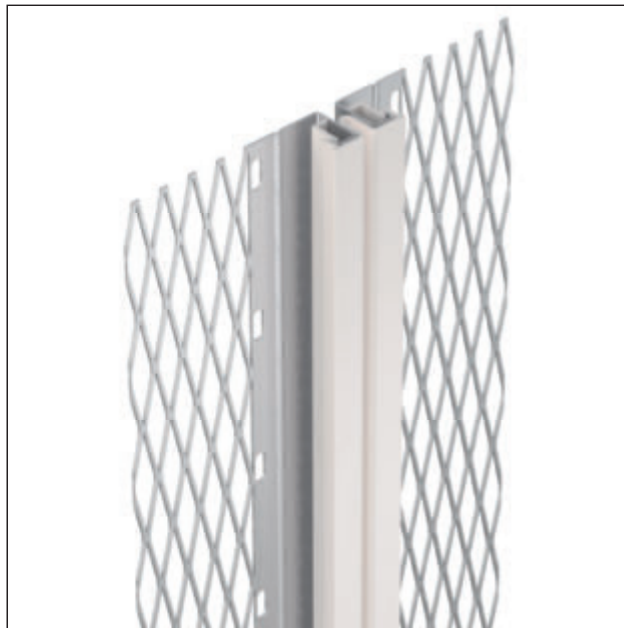

Status: 31.07.2026 | 08:17

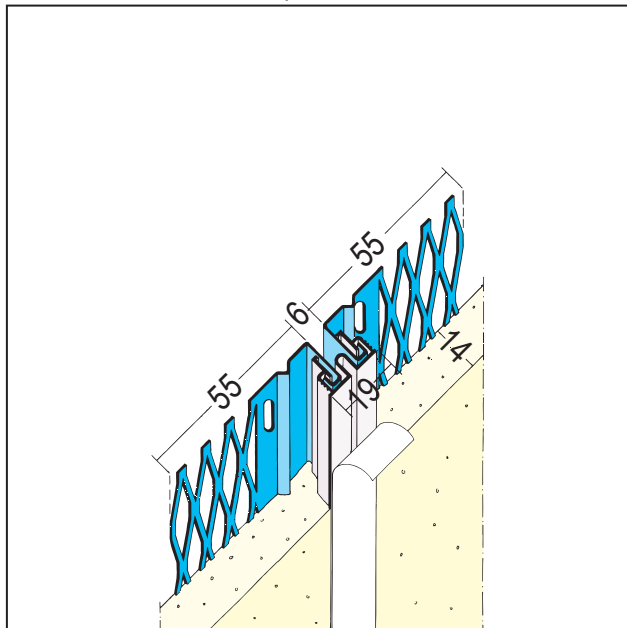

|                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Designation</b>                    | Movement joint bead for interior and exterior plaster from 14 mm, surface area                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Description</b>                    | PROTEKTOR movement bead made of galvanised steel and a soft PVC centre section is suitable for interior and exterior plaster from 14 mm. For outdoor use only in vertical applications.                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Product area</b>                   | Interior plaster   Exterior plaster                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Product category</b>               | Joint profiles                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Types of mortar</b>                | Silicate plaster, Insulating plaster, Deposits cleaning, Gypsum mortars and mortars containing gypsum, Gypsum plaster, Lime plaster, Lime cement plaster                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Plaster thickness</b>              | 14 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Standard EN</b>                    | EN 13658-2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Galvanizing</b>                    | Z 275                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                       | 6 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Revision</b>                       | PVC central piece offers limited possibilities for applying suitable coatings. Approval is required from the coating material manufacturer.                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Motion recording train / print</b> | +/-1,5 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Application Areas</b>              | Only to be installed vertically on damp or wet surfaces.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Reaction to fire (R2F)</b>         | E                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Treatment</b>                      | Profile joints and connections to expansion beads must be installed correctly and in accordance with the specific load conditions. In outdoor areas and in areas subject to moisture, the client must ensure proper waterproofing, e.g. using suitable, system-compatible sealants or by installing pre-compressed sealing tapes. The relevant specifications and installation instructions provided by the manufacturers of the sealants or sealing tapes used must be observed. The product-specific areas of application and installation instructions for the profile must also be taken into account. |
| <b>Leaflet</b>                        | * Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, <a href="http://www.europrofiles.com">www.europrofiles.com</a><br>* Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, <a href="http://www.europrofiles.com">www.europrofiles.com</a><br>* Leaflet Winter Construction Sites; Publisher: Bundesverband der Gipsindustrie e.V., <a href="http://www.gips.de">www.gips.de</a>                                                                                           |
| <b>Customs tariff number</b>          | 73269060                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Opened label</b>                   | Purchase only possible as full packaging units.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

# PRODUCT DATA SHEET

Movement joint bead for interior and exterior plaster  
from 14 mm, surface area  
Item no. 7503



| Item number | Length (cm) | Plaster thickness | Material                              | Colour     | Packaging unit  |
|-------------|-------------|-------------------|---------------------------------------|------------|-----------------|
| 102506      | 300.00      | 14 mm             | Galvanised steel, with<br>PVC coating | 10 - white | 10 PCS / 24 BOX |

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!