


PRODUCT DATA SHEET

Movement joint bead for dry lining
from 9.5 mm GK
Item no. 8068



Status: 31.07.2026 | 08:11

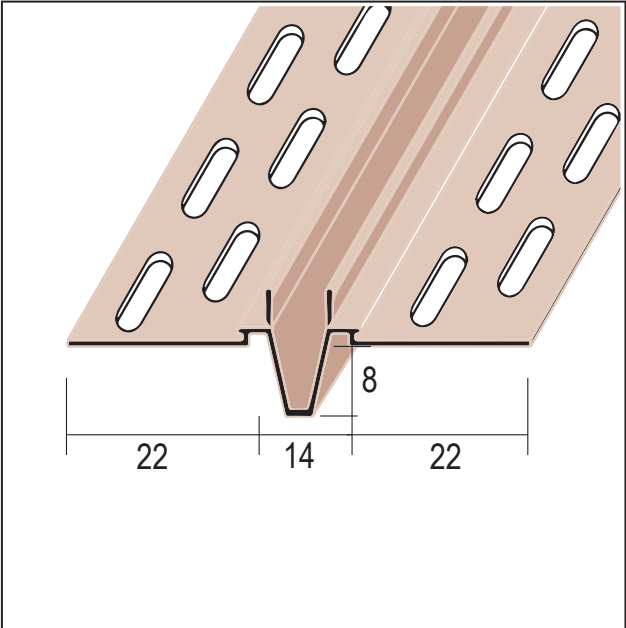

Designation	Movement joint bead for dry lining from 9.5 mm GK
Description	Movement bead made of PVC with a flexible connection in the centre section, which allows for controlled movement of 9.5 mm. The tear-off strip protects the centre section from filler and also serves as a guide. A proper underlay on fireproof walls remains necessary.
Product area	Interior finishing
Product category	Filler profiles
Plaster thickness	1 mm
GK/Plate	9,5 mm
Leg length	22 mm
Motion recording train / print	+/- 5 mm
Customs tariff number	39162000
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Packaging unit
110405	305.00	1 mm	Hard PVC	20 PCS / 80 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!