



PRODUCT DATA SHEET

Dimpled sheet profile Universal - Base profile
Aluminium
Item no. 90527

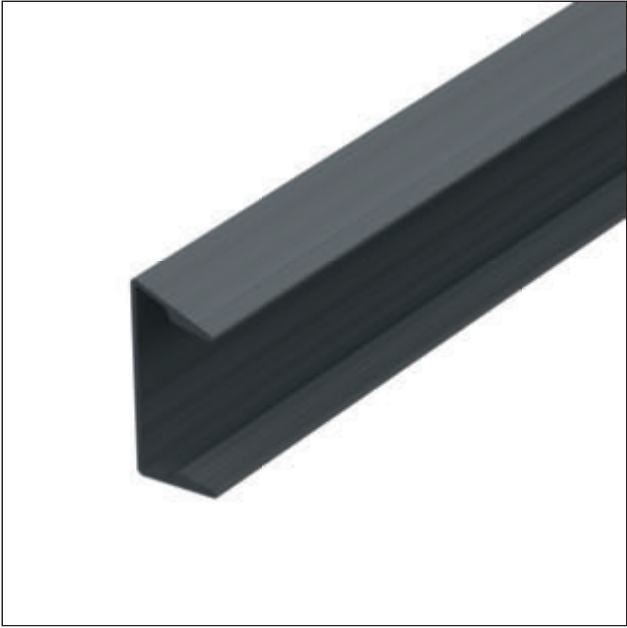

Status: 01.08.2026 | 16:59

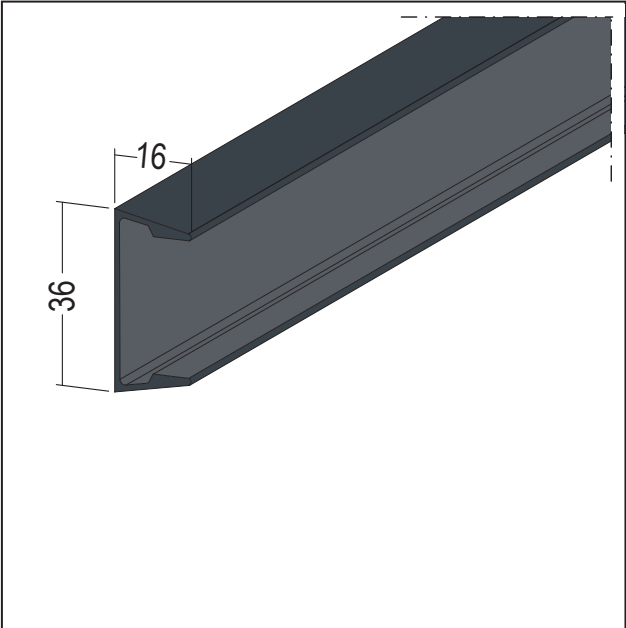

Designation	Dimpled sheet profile Universal - Base profile Aluminium
Description	Aluminium base profile, for the Protector Studded Track Profile Universal, for bonding to the plastered wall surface at the transition between the base and the area in contact with the ground (upper edge of the ground GOK).
Product area	Exterior plaster
Product category	Connecting profiles
Application Areas	To remove unsightly transitions in the plinth area of plaster and ETICS. Clean transition from façade to dimpled membrane or drain mat. Universally applicable for new buildings and existing buildings. Retrofitted, quick and uncomplicated.
Underground	The surface must be dry, free of dust and grease. The powder-coated back of the aluminium base profile may be equipped with pre-treat with a suitable primer to improve adhesive adhesion (e.g. Tremco-IIIbruck AT140, note processing instructions). The plaster, paint or masonry substrate to be glued, Concrete, wood, etc. must be strong and load-bearing. If necessary, suitable substrate pre-treatment is required.
Treatment	On the back of the prepared aluminium base profile two parallel straight-lined, each approx. 5 mm wide adhesive beads of a suitable glue (application quantity depending on the substrate condition). Basic profile with the upper edge along the defined later upper edge of the terrain (GOK), align and press firmly. If a grouting is made between the substrate and the base profile the adhesive and sealant can be applied in joint width and applied within the skin formation time. After the adhesive has completely hardened, clip on the cover profile and apply the gravel drainage up to the top edge of the profile.
Overplastering Ability	We recommend for bonding the basic aluminium profile: - Primer Tremco-IIIbruck AT 140 - 1-component hybrid polymer adhesive/sealant Tremco-IIIbruck SP 525, anthracite or white.
Annotation	We recommend for bonding the basic aluminium profile: - Primer Tremco-IIIbruck AT 140 - 1-component hybrid polymer adhesive/sealant Tremco-IIIbruck SP 525, anthracite or white.
Customs tariff number	76042990
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Colour	Packaging unit
119860	250.00	Aluminum	91 - anthracite	5 PCS / 80 BUN

PRODUCT DATA SHEET

Dimpled sheet profile Universal - Base profile

Aluminium

Item no. 90527



This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!