



PRODUCT DATA SHEET

Dimpled sheet profile universal - Set Anthracite
Item no. 90535

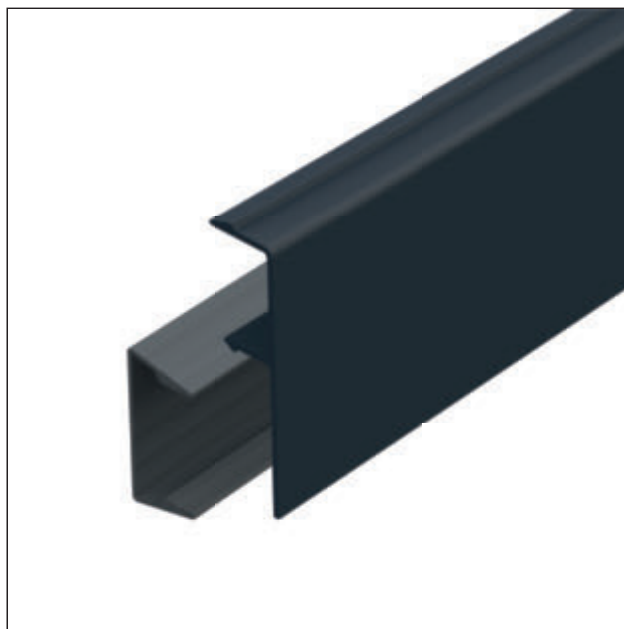

Status: 10.09.2026 | 13:00

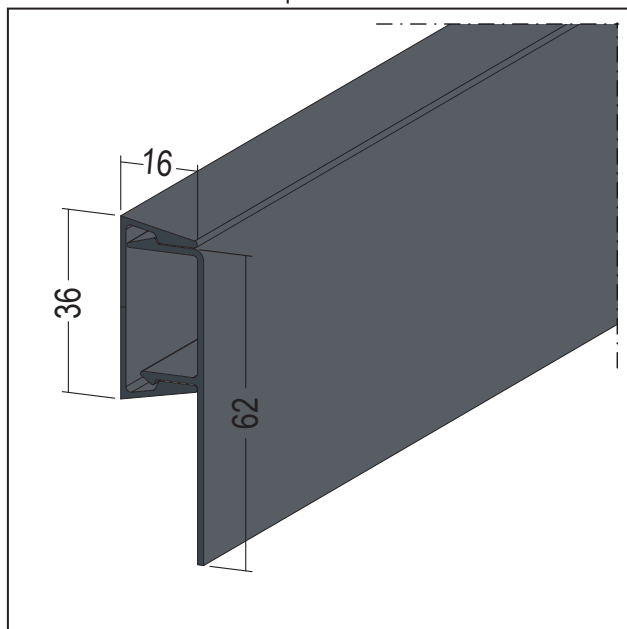

Designation	Dimpled sheet profile universal - Set Anthracite
Description	Dimpled conveyor profile universal set 90535 for 12.5 m convoluted conveyor cover, consisting of: 5 basic profiles 90527 (aluminium) and 5 cover profiles 37527 (rigid PVC). The profile combination is the perfect two-part solution for the subsequent removal of unsightly transitions in the plinth area.
Product area	Exterior plaster
Product category	Connecting profiles
Application Areas	To remove unsightly transitions in the plinth area of plaster and ETICS. Clean transition from façade to dimpled membrane or drain mat. Universally applicable for new buildings and existing buildings. Retrofitted, quick and uncomplicated.
Underground	Substrates must be dry, free of dust and grease. The powder-coated back of the aluminium base profile may be equipped with pre-treat with a suitable primer to improve adhesive adhesion (e.g. Tremco-Ilbruck AT140, note processing instructions). The substrate to be glued on is made of plaster, paint or masonry, concrete, Wood etc. must be strong and load-bearing. If necessary, suitable substrate pre-treatment is required.
Treatment	On the back of the prepared aluminium base profile two parallel straight-lined, each approx. 5 mm wide adhesive beads of a suitable glue (application quantity depending on the substrate condition). Basic profile with the upper edge along the defined later upper edge of the terrain (GOK), align and press firmly. If a grouting is made between the substrate and the base profile the adhesive and sealant can be applied in joint width and applied within the skin formation time. After the adhesive has completely hardened, clip on the cover profile and apply the gravel drainage up to the top edge of the profile.
Consumption	The set consists of 5 basic profiles of 250 cm each and 5 cover profiles of 250 cm each. The profile combination of 5 x 250 cm is sufficient for 12.5 metres of studded track cover.
Overplastering Ability	We recommend for bonding the basic aluminium profile: - Primer Tremco-Ilbruck AT 140 - 1-component hybrid polymer adhesive/sealant Tremco-Ilbruck SP 525, anthracite
Annotation	We recommend for bonding the basic aluminium profile: - Primer Tremco-Ilbruck AT 140 - 1-component hybrid polymer adhesive/sealant Tremco-Ilbruck SP 525, anthracite
Customs tariff number	76042990
Opened label	Purchase only possible as full packaging units.

PRODUCT DATA SHEET

Dimpled sheet profile universal - Set Anthracite

Item no. 90535



Item number	Length (cm)	Material	Colour	Packaging unit
119863	250.00	Aluminum with rigid PVC	91 - anthracite	1 PCE / 36 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!