


PRODUCT DATA SHEET

Ventilation angle double-sided square perforation
30 x 50 mm, Aluminium
Item no. 9071



Status: 30.07.2026 | 21:28

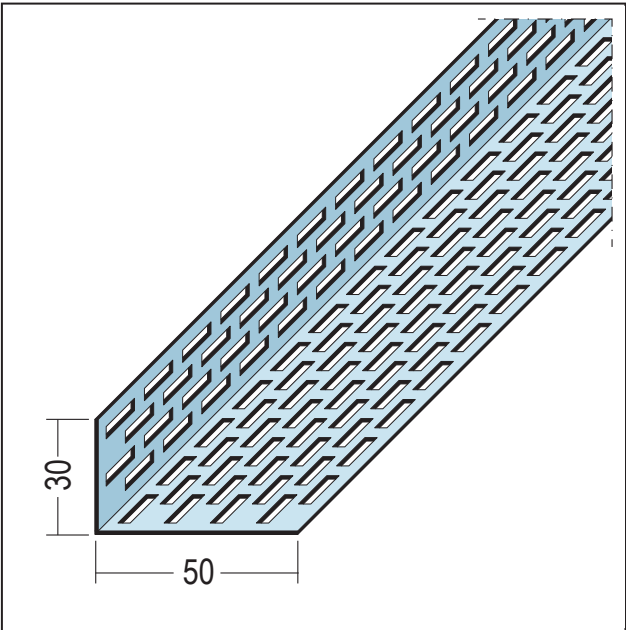

Designation	Ventilation angle double-sided square perforation 30 x 50 mm, Aluminium
Description	The PROTEKTOR black aluminium ventilation angle with double-sided square perforations ensures optimal and effective ventilation while extracting moisture caused by diffusion or condensate water formation. It also provides the best possible degree of protection against the entry of small animals into the ventilation area. Free ventilation cross-section 92/185 cm²/lfm
Product area	Ventilation profiles
Product category	Roof ventilation Facade ventilation Protektor ventilation system
Material thickness	0,8 mm
Product width	50 mm
Product height in mm	30 mm
Ventilation cross section in cm2	92/185 cm²/lfm.
Reaction to fire (R2F)	A1
Overplastering Ability	Powder coating in accordance with RAL specification available for an extra charge.
Annotation	Powder coating in accordance with RAL specification available for an extra charge.
Customs tariff number	76042990
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Colour	Packaging unit
112035	250.00	Aluminum	NA - natur	20 PCS / 144 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!