



PRODUCT DATA SHEET

Stop bead for interior plaster
from 10 mm
Item no. 9135

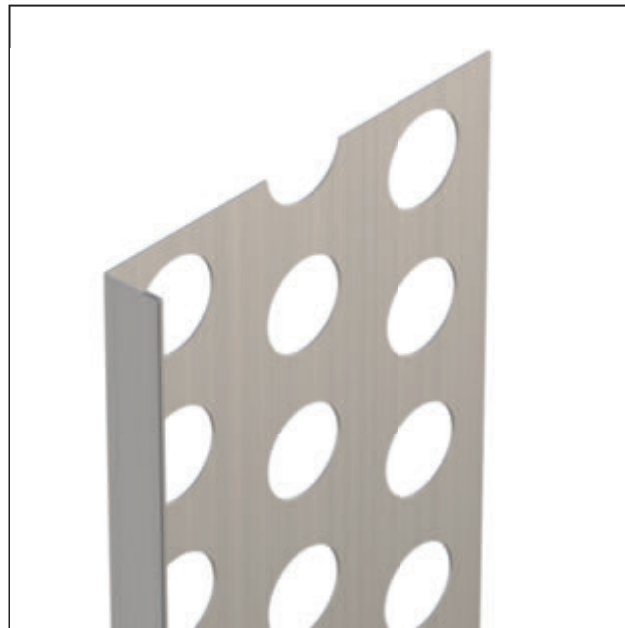

Status: 30.07.2026 | 20:39

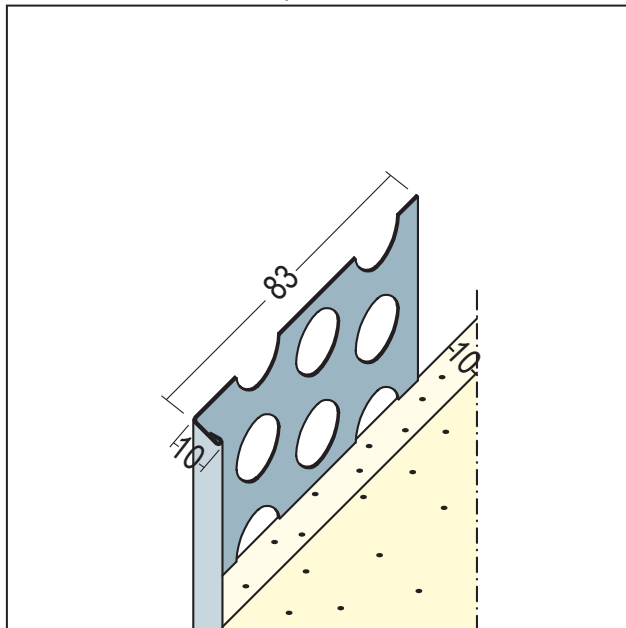

Designation	Stop bead for interior plaster from 10 mm
Description	PROTEKTOR aluminium stop bead for interior plaster from 10 mm. With extra-long plaster leg for forming connections and finishes for wall and ceiling plaster, e.g. in frame or skeleton construction, expansion joints or soffits.
Product area	Interior plaster
Product category	Plaster/render stops
Types of mortar	Clay plaster, Insulating plaster, Gypsum mortars and mortars containing gypsum, Attachment mortar
Plaster thickness	10 mm
Standard EN	EN 13658-1
Reaction to fire (R2F)	A1
Leaflet	* Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, www.europrofiles.com * Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, www.europrofiles.com * Leaflet Winter Construction Sites; Publisher: Bundesverband der Gipsindustrie e.V., www.gips.de
Customs tariff number	76042990
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Packaging unit
105937	250.00	10 mm	Aluminum natural	20 PCS / 150 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!