



PRODUCT DATA SHEET

Stop bead for thermal insulation for roof ventilation
from 13 mm
Item no. 9224

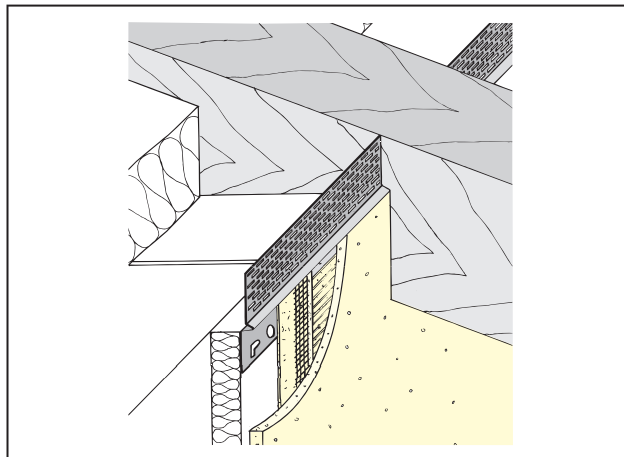

Status: 30.07.2026 | 20:26

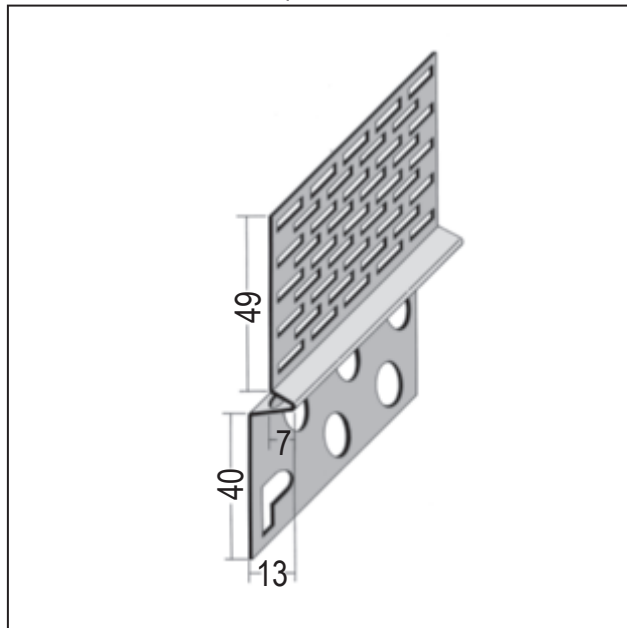

Designation	Stop bead for thermal insulation for roof ventilation from 13 mm
Description	Aluminium corner profile with white case coating for installation between the rafters, providing DIN-conform roof ventilation. For installing on the insulation layer. Ventilation cross section: 207 cm ² /lfm.
Product area	Exterior plaster Thermal insulation Ventilation profiles
Product category	Plaster/render stops Connection and end profiles Eaves profile Clip-on profiles Ventilation special forms
Types of mortar	Silicate plaster, Reinforcing plaster organ, Insulating plaster, Deposits cleaning, Gypsum mortars and mortars containing gypsum, Gypsum plaster, Lime plaster, Lime cement plaster, Clay plaster
Plaster thickness	13 mm
Ventilation cross section in cm²	207 cm ² /lfm.
Customs tariff number	76042990
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Colour	Packaging unit
101992	250.00	13 mm	Aluminum, with basic coating	10 - white	20 PCS / 70 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!