


PRODUCT DATA SHEET

Connector
Aluminium
Item no. 9471



Status: 30.07.2026 | 19:14

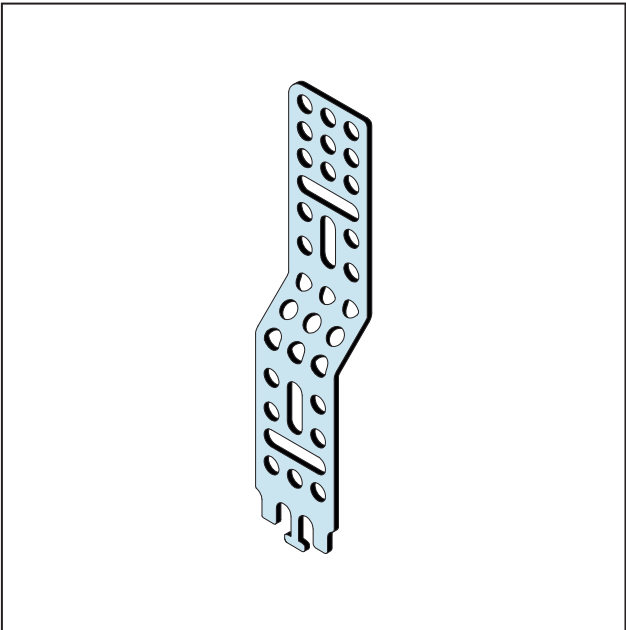

Designation	Connector Aluminium
Description	Connector for TENSION-FREE and DECOUPLED installation of ventilation profiles for substructures. We recommend installing on every substructure profile. The new Protektor ventilation system for rear-ventilated curtain façades is easy to use and provides long-lasting quality. This is the very first ventilation system that utilises a connector to ensure tension-free and decoupled ventilation profile installation and conforms to the DIN norms. Another advantage is the continuous adjustability for widths between 160 and 230 mm. This is achieved through the use of a profile combination comprised of a system and ventilation angle. Detailed installation instructions can be found at www.protektor.com/Downloads/Technische Unterlagen/ Fassadenprofile-Produktvorstellung/PLS
Product area	Ventilation profiles
Product category	Roof ventilation Facade ventilation Protektor ventilation system
Material thickness	1,5 mm
Reaction to fire (R2F)	A1
Customs tariff number	76169990
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Colour	Packaging unit
109533	11.00	Aluminum	NA - natur	50 PCE / 999 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!