


PRODUCT DATA SHEET

Plain bearing joint profile for ETICS
6 mm, to insert
Item no. 9540



Status: 01.08.2026 | 21:29

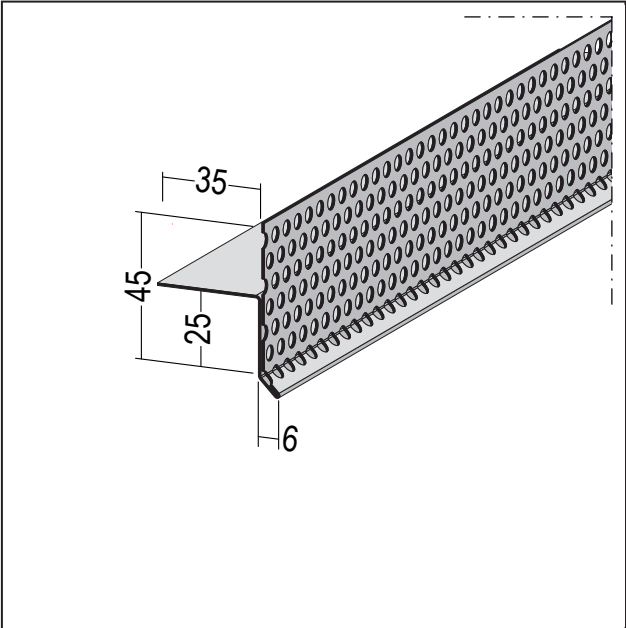

Designation	Plain bearing joint profile for ETICS 6 mm, to insert
Description	PROTEKTOR plain bearing joint profile aluminium insert profile is suitable for forming sliding bearing joints in ETICS systems. Particularly suitable for joint formation in lightweight construction extensions.
Product area	Thermal insulation
Product category	Joint profiles
Plaster thickness	6 mm
Product width	41 mm
Leg length	35 mm
Product height in mm	51 mm
Reaction to fire (R2F)	A1
Treatment	Profile for subsequent insertion into the plain bearing joint, e.g. between a massive old building and a building extension in lightweight construction. Permanent sealing can be realized between the downside leg and the building by using a pre-compressed sealing tape. Pull the fabric in the reinforcement layer to the bottom edge of the profile. Corners must be mitred, the fabric and sealing tape must be sufficiently led around the corner. Insert profiles are matched to organic and mineral plaster buildings.
Customs tariff number	76042990
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Packaging unit
115637	250.00	6 mm	Aluminum natural	10 PCS / 48 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!