


PRODUCT DATA SHEET

Armoured mesh corner angle for thermal insulation
120 x 80 mm
Item no. 1092



Status: 01.08.2026 | 09:30

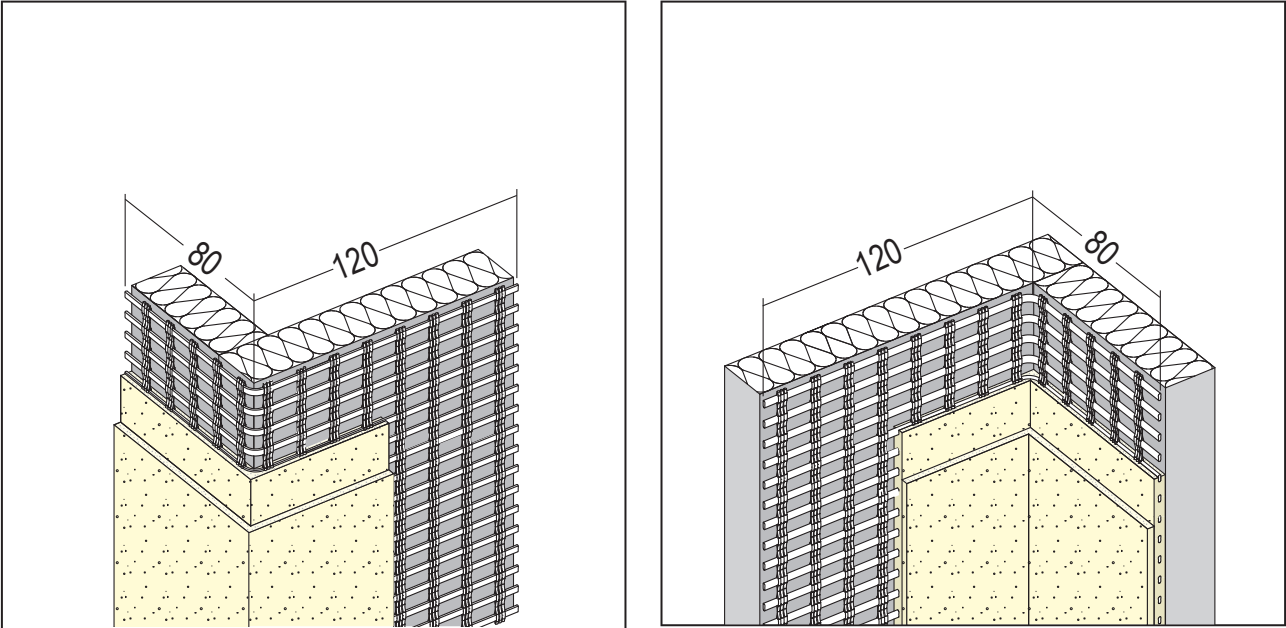

Designation	Armoured mesh corner angle for thermal insulation 120 x 80 mm
Description	PROTEKTOR mesh wing corner bead made of alkali-resistant reinforced mesh 320 g/m², white, mesh size 20 x 18 mm, suitable for external and internal corners.
Product area	Thermal insulation
Product category	Corner profiles
Grammage	320 g/m²
Mesh size	18 x 20 mm
Overplastering Ability	Tensile strength per 5 cm: As-delivered condition Tensile strength warp (N/5cm) 4340 N Maximum tensile force (stretching) 2.2 \% Tensile strength weft (N/5cm) 9876 N Maximum tensile force (stretching) 1.8 \% After 28-day storage in 5\% in caustic soda Tensile strength warp (N/5cm) 2843 N Maximum tensile force (stretching) 2.1 \% Tensile strength weft (N/5cm) 6586 N Maximum tensile force (stretching) 1.6 \%
Annotation	Tensile strength per 5 cm: As-delivered condition Tensile strength warp (N/5cm) 4340 N Maximum tensile force (stretching) 2.2 \% Tensile strength weft (N/5cm) 9876 N Maximum tensile force (stretching) 1.8 \% After 28-day storage in 5\% in caustic soda Tensile strength warp (N/5cm) 2843 N Maximum tensile force (stretching) 2.1 \% Tensile strength weft (N/5cm) 6586 N Maximum tensile force (stretching) 1.6 \%
Customs tariff number	70199000
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Colour	Packaging unit
102309	260.00	Alkali-resistant glass fibre mesh	10 - white	50 PCS / 24 BOX

PRODUCT DATA SHEET

Armoured mesh corner angle for thermal insulation

120 x 80 mm

Item no. 1092



This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!