

PRODUCT DATA SHEET



Featured bead with shadow gap for interior plaster

10 mm

Item no. 1306



Status: 01.08.2026 | 05:01

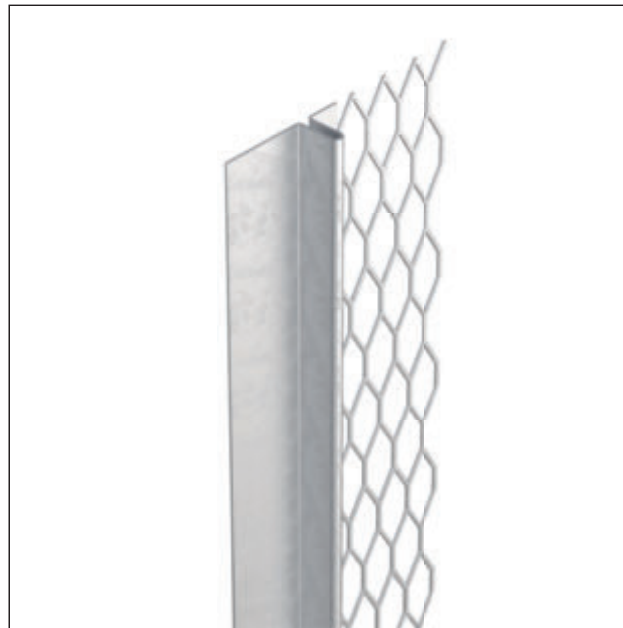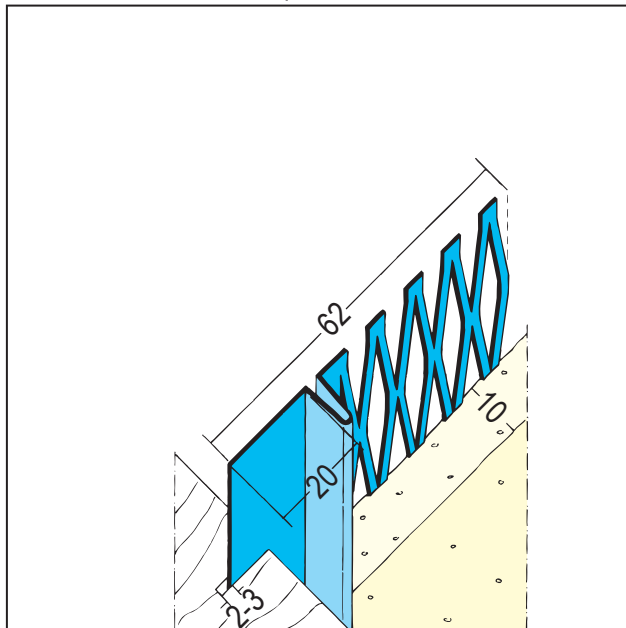

Designation	Featured bead with shadow gap for interior plaster 10 mm
Description	PROTEKTOR featured bead made of galvanised steel with 20 mm shadow gap is suitable for interior plaster from 10 mm. Shadow gaps (e.g. on timber block frames, half-timbered structures, etc.) in various widths. Stop bead for demarcating protruding plaster surfaces.
Product area	Interior plaster
Product category	Design profiles
Types of mortar	Silicate plaster, Insulating plaster, Deposits cleaning, Gypsum mortars and mortars containing gypsum, Gypsum plaster, Lime plaster, Lime cement plaster
Plaster thickness	10 mm
Standard EN	EN 13658-1
Galvanizing	Z 275
Reaction to fire (R2F)	A1
Treatment	Do not set the profile too deep in the groove when creating connections, e.g. to wooden block frames, and maintain a distance of 2-3 mm.
Leaflet	* Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, www.europrofiles.com * Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, www.europrofiles.com * Leaflet Winter Construction Sites; Publisher: Bundesverband der Gipsindustrie e.V., www.gips.de
Shadow gap	20 mm
Customs tariff number	73269060
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Packaging unit
115990	250.00	10 mm	Galvanised steel	15 PCS / 47 BOX
115991	300.00	10 mm	Galvanised steel	15 PCS / 47 BOX

PRODUCT DATA SHEET

Featured bead with shadow gap for interior plaster

10 mm

Item no. 1306



This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!