

PRODUCT DATA SHEET


Laths for interior and exterior plaster (Stucanet® S)

Steel galvanised, 240 x 70 cm

Item no. 17710



Status: 01.08.2026 | 04:26

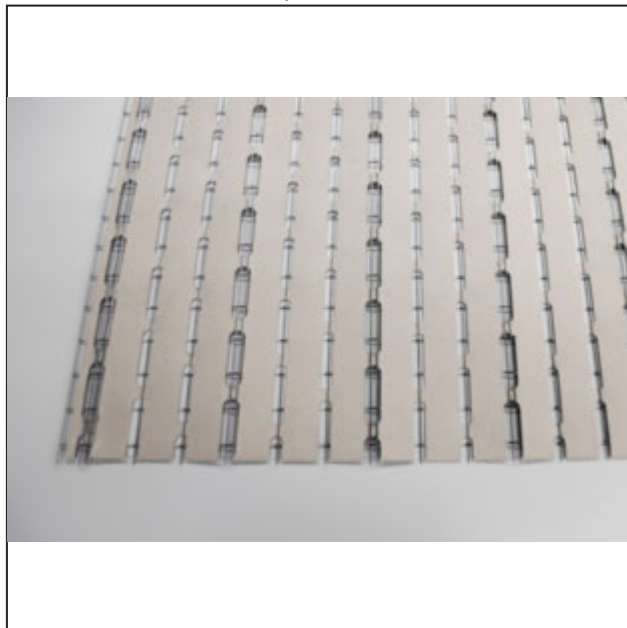

Designation	Laths for interior and exterior plaster (Stucanet® S) Steel galvanised, 240 x 70 cm
Description	Plaster base in panel form made of galvanised, spot-welded wires with moisture-absorbing cardboard inserted. The perforation ensures a solid, force-fit bond with the plaster. The plaster base provides a uniform plaster base on ceilings, interior walls or facades. Panel dimensions: 240 x 70 cm (1.68 m²) Mesh size: surface 38 x 50 mm; edge 38 x 27 mm Zinc coating: min. 60 g/m² Tensile strength: > 350 N/mm When properly fastened with suitable fasteners and a sufficiently load-bearing substrate, the maximum surface load is 60 kg/m² (e.g. due to applied plaster).
Product area	Interior plaster
Product category	Plaster base
Plaster thickness	20 mm
Material thickness	1,5 mm
Standard EN	EN 13658
Product width	700 mm
Mesh size	38 x 50 mm
Application Areas	Ideal as a plaster base when creating partition walls, lining supply shafts and avoiding cracking on lintels and mixed masonry, half-timbered renovations, cross vaults and many other applications.
Reaction to fire (R2F)	E
Underground	Load-bearing subsurface for fastening.
Treatment	The plaster base is to be attached to the double wire rows every 45 cm (9 attachments per m ²). The plaster base must be overlapped by two meshes in the edge area, the cardboard of the plaster base on top has to be removed at this point. When connecting to stable masonry or concrete, the plaster base must overlap at least three meshes; the cardboard must be removed in this area.
Overplastering Ability	Board dimensions: 240 x 70 cm (1.68 m ²)
Storage	Plaster bases must be stored in a cool, dry place.
Annotation	Board dimensions: 240 x 70 cm (1.68 m ²)

PRODUCT DATA SHEET

Laths for interior and exterior plaster (Stucanet® S)

Steel galvanised, 240 x 70 cm

Item no. 17710



Leaflet

* Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, www.europrofiles.com

* Leaflet Planning and Application of Metallic Plaster Profiles; Publisher: European Trade Association Europrofiles, www.europrofiles.com

* Leaflet Winter Construction Sites; Publisher: Bundesverband der Gipsindustrie e.V., www.gips.de

Customs tariff number

73143100

Opened label

Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Packaging unit
116295	240.00	20 mm	Galvanised steel	15 PCE / 25 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!