

PRODUCT DATA SHEET

Movement joint bead for dry lining
for filling
Item no. 3750

Status: 31.10.2026 | 07:01

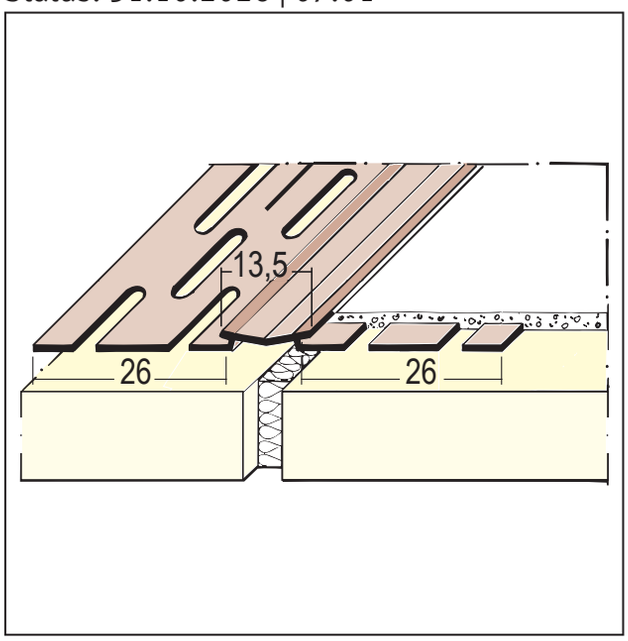

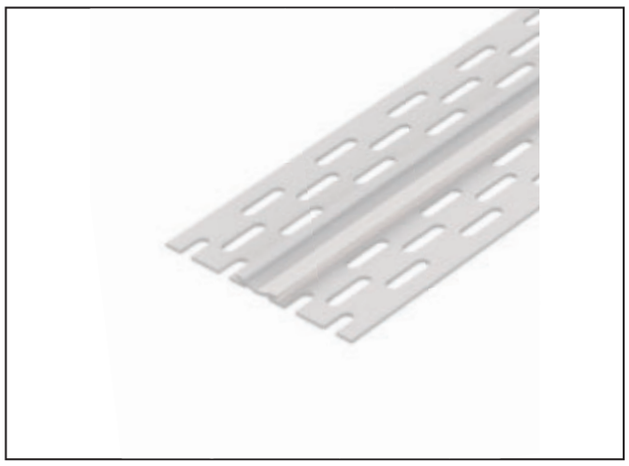

Designation	Movement joint bead for dry lining for filling
Description	PROTEKTOR movement bead made of PVC with soft PVC centre section for forming movement joints in wall or ceiling areas in accordance with the requirements of DIN 18181. Suitable for installation in flat surfaces as well as in internal corners. IMPORTANT! The PVC centre section can only be coated with suitable coatings to a limited extent. Approval from the coating manufacturer is required.
Product area	Interior finishing
Product category	Filler profiles
Plaster thickness	1 mm
GK/Plate	ab 8 mm
	13 mm
Revision	IMPORTANT! PVC central piece offers limited possibilities for applying suitable coatings. Approval is required from the coating material manufacturer.
Motion recording train / print	+/-1,5 mm
Treatment	Secure the profile additionally with clips and apply adhesive to the entire surface on both sides up to the soft PVC centre section.
Customs tariff number	39162000
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Colour	Packaging unit
102521	7,500.00	1 mm	Rigid PVC with soft PVC	10 - white	1 ROL / 120 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general. Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!

PROTEKTORWERK Florenz Maisch GmbH & Co. KG | Viktoriastraße 58 | D-76571 Gaggenau | Tel.+49 7225 977- 0 | www.protektor.com