



PRODUCT DATA SHEET

Movement joint bead for interior plaster
10 mm, surface/corner
Item no. 3754

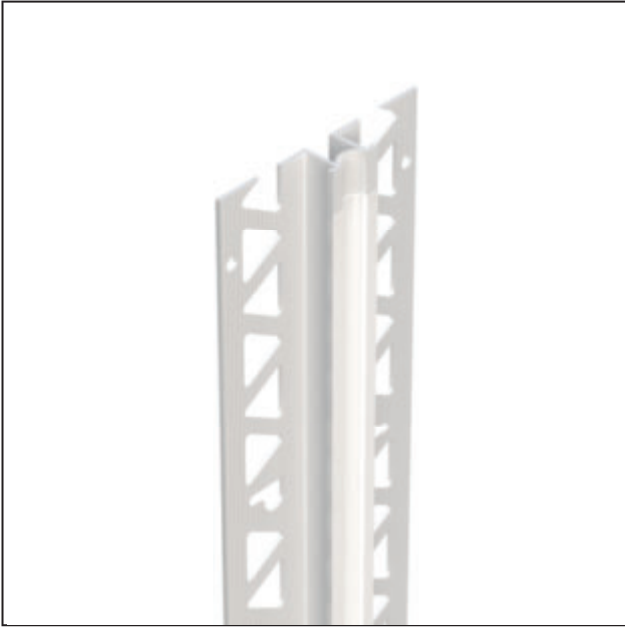

Status: 01.08.2026 | 00:04

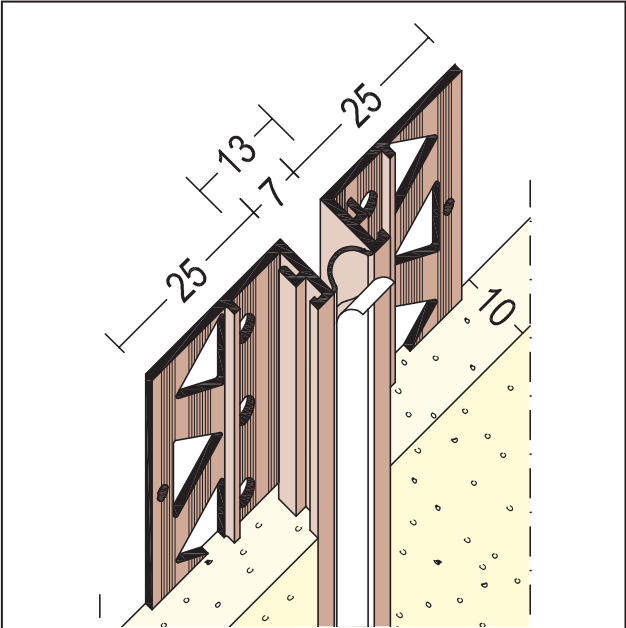

Designation	Movement joint bead for interior plaster 10 mm, surface/corner
Description	PROTEKTOR movement bead made of hard PVC and centre section made of soft PVC, suitable for interior and exterior plaster from 10 mm, for use on flat surfaces and in interior corners. For exterior use and in damp rooms, only for vertical use.
Product area	Interior plaster
Product category	Joint profiles
Plaster thickness	10 mm
Revision	PVC central piece offers limited possibilities for applying suitable coatings. Approval is required from the coating material manufacturer.
Motion recording train / print	+/-1,5 mm
Application Areas	Only to be installed vertically on damp or wet surfaces.
Treatment	Profile joints and connections to expansion beads must be installed correctly and in accordance with the specific load conditions. In outdoor areas and in areas subject to moisture, the client must ensure proper waterproofing, e.g. using suitable, system-compatible sealants or by installing pre-compressed sealing tapes. The relevant specifications and installation instructions provided by the manufacturers of the sealants or sealing tapes used must be observed. The product-specific areas of application and installation instructions for the profile must also be taken into account.
Customs tariff number	39162000
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Colour	Packaging unit
110695	275.00	10 mm	PVC	10 - white	25 PCS / 36 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!