

PRODUCT DATA SHEET



Frameseal bead with shadow gap, mesh

22.5 mm

Item no. 39622



Status: 01.08.2026 | 21:06

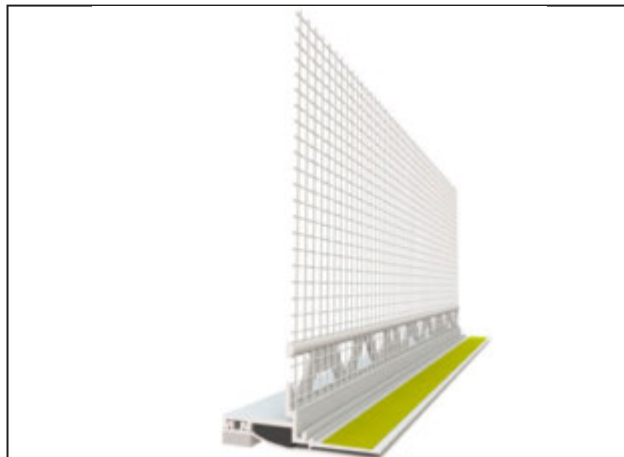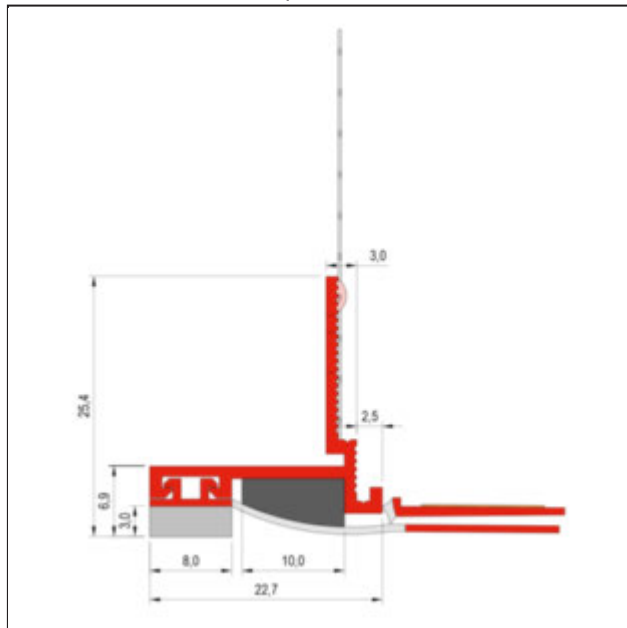

Designation	Frameseal bead with shadow gap, mesh 22.5 mm
Description	The self-adhesive PROTEKTOR frame seal bead made of PVC with welded alkali-resistant glass fibre mesh, shadow gap and tear-off soft adhesive strip for foil coverings and increased movement absorption. The foam tape is self-adhesive, closed-cell and suitable for alignment during application and temporary fixing on site for composite thermal insulation systems. With a 10 mm wide pre-compressed joint sealing tape and for creating visually and technically flawless connections to soffits and façade cladding.
Product area	Thermal insulation
Product category	Soffit profiles
Types of mortar	Reinforcing plaster, Reinforcing plaster organ
Plaster thickness	6 mm
Product width	22,5 mm
Grammage	160 g/m ²
Mesh size	4x4 mm
Application Areas	Meets the highest requirements for component joints. Also suitable for surfaces that are difficult to bond to.
Treatment	Please note the PROTEKTOR processing guidelines and recommendations. Can be used up to a window size of 15 m ² and an insulation thickness of up to 400 mm. Sealing is done using the integrated joint sealing tape. Suitable for surfaces that are difficult to stick on. Activation of the joint sealing tape when the tear-off tab is removed. Instructions for cleaning must be observed.
Tool	PVC scissors
Treatment Temperature	5 °C - 40 °C
Storage	Store profiles dry, frost-free, horizontally and flat in the box. Do not store or transport profiles twisted or bent. Protect boxes and/or profiles from excessive heat and direct sunlight. To remove the profiles, open the box along its entire length.
Security Advice	Observe the protector processing guidelines for fabric plastering strips. For window sizes over 15 m ² and insulation thicknesses over 400 mm, the window connection must be agreed in advance.
Impermeability to driving rain	bis 600 Pa
product line	TopLine
Test report	Test report 2024-18 0530-K1, Test report 2024-18 0530-K2

PRODUCT DATA SHEET

Frameseal bead with shadow gap, mesh

22.5 mm

Item no. 39622



connection joint	Shadow gap
Shadow gap	1 mm
Customs tariff number	39259080
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Colour	Packaging unit
120093	240.00	6 mm	Rigid PVC with glass fibre mesh	10 - white	25 PCE / 20 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!