


PRODUCT DATA SHEET

C-Ceiling profile for concave and convex curves
C Ceiling profile 60-27
Item no. 5549



Status: 02.08.2026 | 05:08

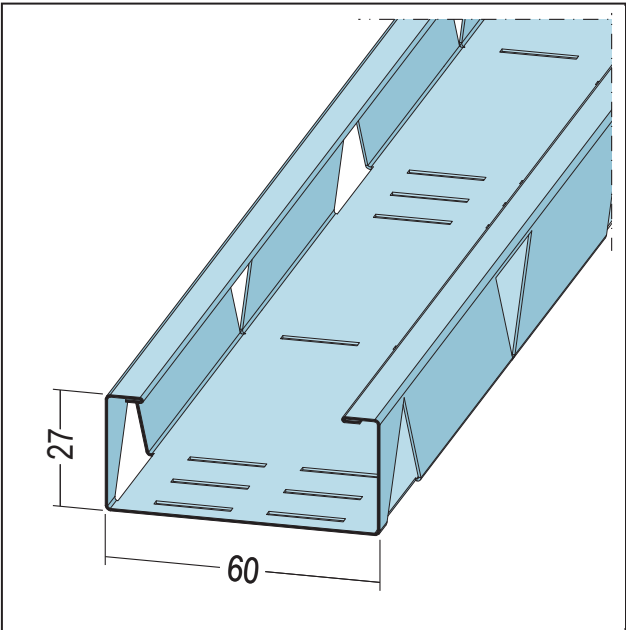

Designation	C-Ceiling profile for concave and convex curves C Ceiling profile 60-27
Description	Application area: for curved ceiling constructions. Profiles must be bent on site. Minimum bending radius 110 mm. The specifications of the manufacturer of the boards must be observed
Product area	Dry lining
Product category	Formable profiles flexibilo
Material thickness	0,6 mm
Standard EN	EN 14195:2005/AC:2006
Standard	EN 13964
Galvanizing	Z 140
Product width	60 mm
Product height in mm	27 mm
Reaction to fire (R2F)	A1
Customs tariff number	72166190
Processing instructions	The suspension of the curved flexibilo C ceiling profiles no. 5549 must be carried out with Nonius hangers, Nonius inclined hangers and Nonius top parts in the required lengths. The profiles must be bent to the required radius on site before installation. For this purpose, it is recommended to bend the profiles over an edge at the predetermined bending points. C-ceiling profiles No. 5120 are to be installed transversely to the bent flexibilo C-ceiling profiles in longitudinal direction by means of angle anchors No. 6090. The angle anchors are to be secured against slipping with sheet metal screws No. 6239.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
119500	300.00	Galvanised steel	8 PCS / 24 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

PRODUCT DATA SHEET

C-Ceiling profile for concave and convex curves

C Ceiling profile 60-27

Item no. 5549



All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!