


PRODUCT DATA SHEET

U-hanger flat for C 60-27 acoustically insulated
125 mm
Item no. 56367



Status: 31.07.2026 | 20:06

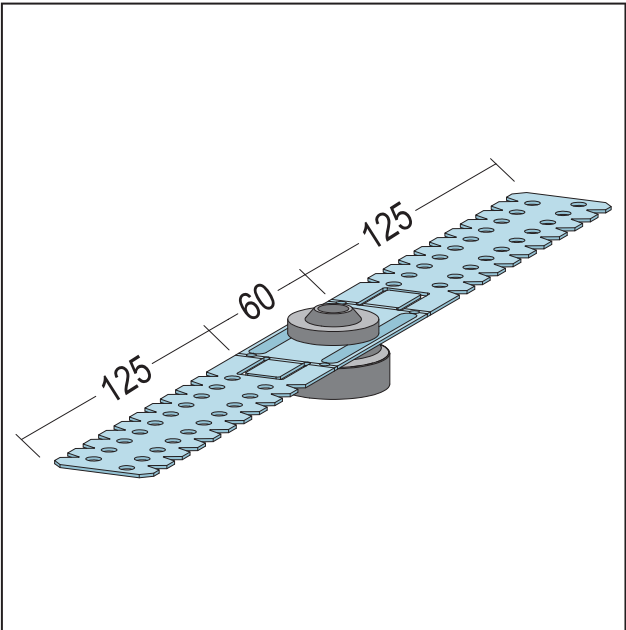

Designation	U-hanger flat for C 60-27 acoustically insulated 125 mm
Description	For attaching CD profiles on hanging ceiling sub-constructions for improving sound insulation.
Product area	Dry lining
Product category	Sound Insulation silencio
Material thickness	0,9 mm
Standard EN	EN 13964:2014
Standard	DIN18168-2
Galvanizing	tested to standard
Product width	125 mm
Capacity class	0,40 kN
Reaction to fire (R2F)	A1
Load bearing capacity	1061 N
Customs tariff number	73089059
Processing instructions	Bend the retaining clip after installation.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
109844	0.00	Galvanised steel	100 PCE / 50 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!