


PRODUCT DATA SHEET

Click-Fix Track mounting C3-C5M universal+
for C 60-27
Item no. 58128



Status: 31.07.2026 | 19:29

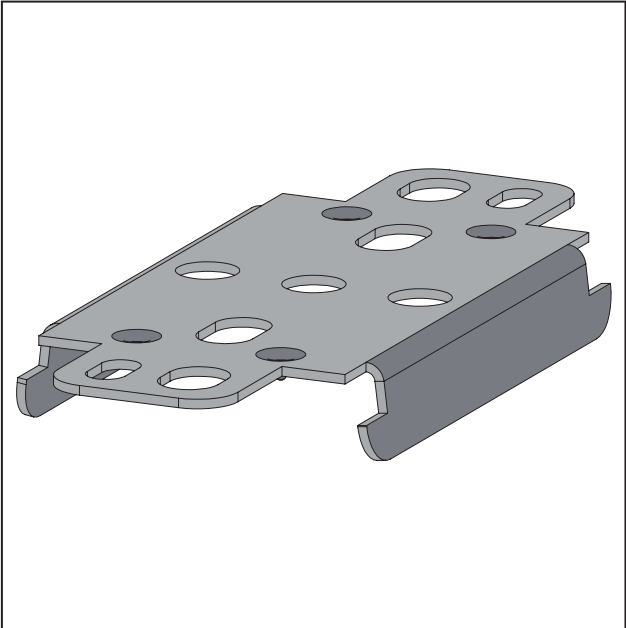

Designation	Click-Fix Track mounting C3-C5M universal+ for C 60-27
Description	For directly attaching CD profiles on hanging ceiling sub-constructions with increased corrosion resistance requirements.
Product area	Dry lining
Product category	Anti corrosion defendo
Material thickness	1 mm
Standard EN	EN 13964:2014
Standard	DIN18168-2
Galvanizing	tested to standard
Standard coating profile	DIN 18219:2024
Capacity class	0,40 kN
Reaction to fire (R2F)	A2-s1, d0
Treatment	- The Click-Fix rail runner is aligned according to the cord strike/laser - Attach Click-Fix rail runner - Clip in ceiling profiles. - Alternatively, the Click-Fix rail runner can be clipped directly into the ceiling profile and mounted using the two holes on the side.
Load bearing capacity	493 N
Customs tariff number	73089059
Processing instructions	See processing description.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
110704	0.00	Galvanised steel with coating	100 PCE / 102 BOX

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!