

# PRODUCT DATA SHEET


Quick install hanger hook/eye

100 - 300 mm

Item no. 6300



Status: 11.04.2024 | 01:04

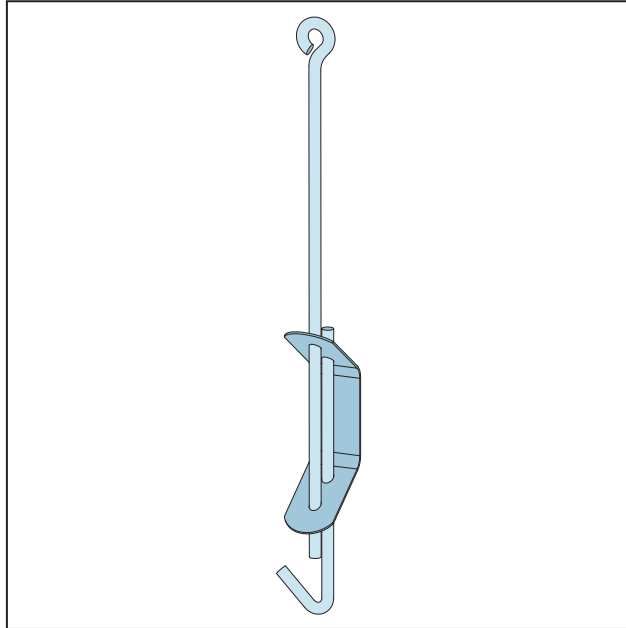

<b>Designation</b>	Quick install hanger hook/eye 100 - 300 mm
<b>Description</b>	For mounting ceiling sub-constructions.
<b>Product area</b>	Dry lining / lightweight steel construction
<b>Product category</b>	Standard accessoires
<b>Material</b>	Steel wire, galvanized / Spring steel
<b>Standard EN</b>	EN 13964:2014
<b>Standard</b>	DIN18168-2
<b>Product length</b>	0 cm
<b>Capacity class</b>	0,15 kN
<b>Reaction to fire (R2F)</b>	A1
<b>Treatment</b>	- Attach the eyelet wire at the required centre distance using suitable fasteners. - Hook the profile into the hook and bend it until it is closed - Readjust if necessary
<b>Packaging Unit</b>	100 PC / 30 BOX
<b>Load bearing capacity</b>	589 N
<b>Processing instructions</b>	see processing description

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!