


PRODUCT DATA SHEET

LED render stop profile
2000 mm
Item no. 6522



Status: 02.08.2026 | 01:17

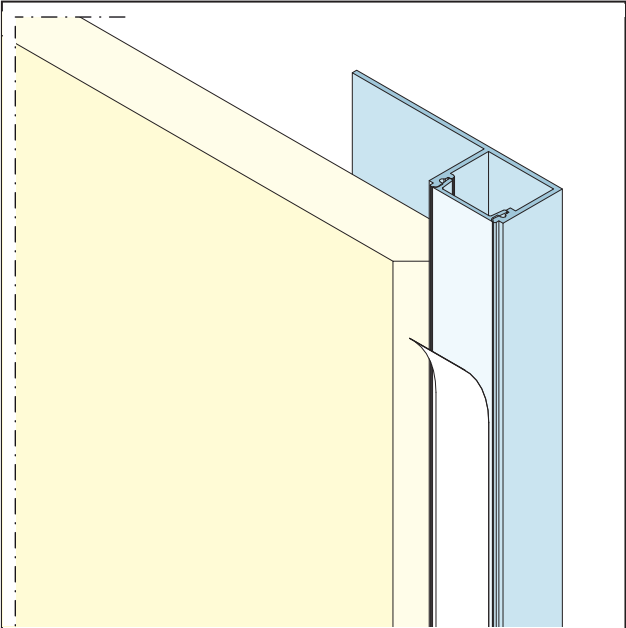

Designation	LED render stop profile 2000 mm
Description	Connecting and end profile with opal plastic cover for LED strips. Suitable for LED strips with max. width 14 mm and max. 15 Watt/m. LED rail without LED strips. For panel thickness 12.5 mm
Product area	Dry lining
Product category	LED Lightdesign - lumino
Material thickness	1 mm
Reaction to fire (R2F)	A1
Treatment	- Fix the profile to the substructure and plank according to the manufacturer's instructions. - Remove the cover profile and replace it with the protective tube 6547 (keep the cover profile). - put the profile - After painting, remove the protective tube as well as paint and plaster residues. - Glue in the LED tape, clip in the cover profile and remove the blue protective strip.
Customs tariff number	76042910
Processing instructions	Filling may only be carried out when no major changes in the length of the panel material are to be expected, e.g. as a result of temperature or moisture changes. Please observe the information in BVG leaflet no. 1 "Construction site conditions". Expansion joints should be made every 4 m (joint width 2 mm <15W LED power/m or 4 mm >15W LED power/m). Chamfer the ends of the profiles. Depending on the product, the LED protective tube with article no. 6547 should be used. Roughen the filling surfaces of the profiles (anodised or powder-coated) before filling. The levelling surfaces of the profiles must also be cleaned before levelling. A reinforcement strip must be used when filling. The respective manufacturer's instructions and standards for the products used must be observed. Degrease the profile with spirit, for example, before painting. The LED technology may only be installed by specialised personnel. The manufacturer's instructions on handling, installation, etc. must be observed and complied with.
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Material	Packaging unit
118335	200.00	Aluminum	4 PCE / 100 BOX

PRODUCT DATA SHEET

LED render stop profile

2000 mm

Item no. 6522



This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!