



PRODUCT DATA SHEET

Plain bearing joint profile for ETICS
from 6 mm, lower part
Item no. 9181

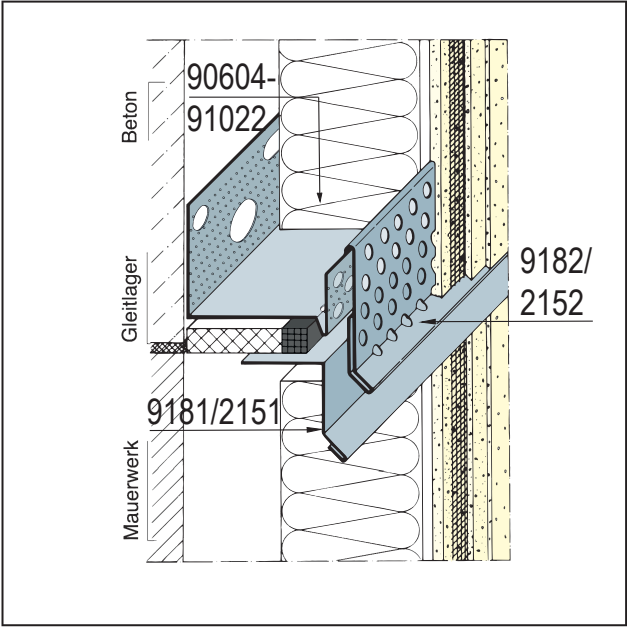

Status: 30.07.2026 | 20:33

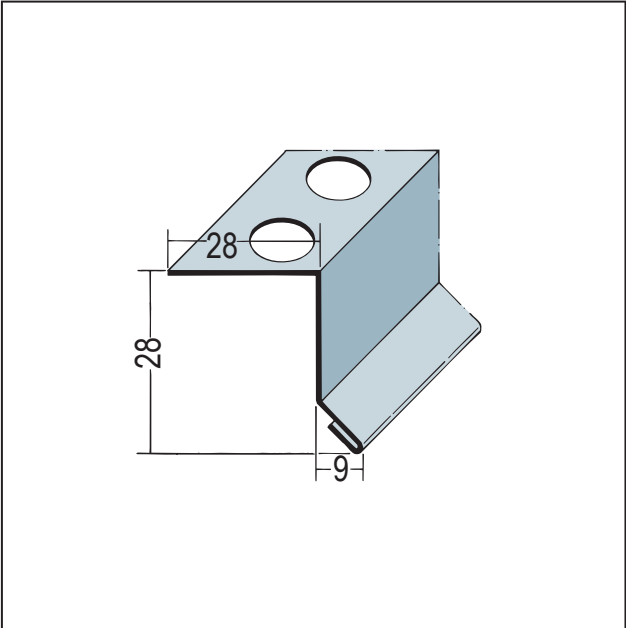

Designation	Plain bearing joint profile for ETICS from 6 mm, lower part
Description	PROTEKTOR plain bearing joint profile – lower section is suitable for forming plain bearing joints for ETICS systems.
Product area	Thermal insulation
Product category	Joint profiles
Plaster thickness	6 mm
Reaction to fire (R2F)	A1
Treatment	Place the lower part 9181/2151 of the combination with the fixing bracket on the upper edge of the insulation board, which runs parallel to the joint or the slide bearing in the building structure at the same height, and coat lightly with adhesive. A polystyrene strip approx. 8 mm thick with Kompriband is placed on the lower part. Place the base profile on the polystyrene strip and fix it to the substrate. After laying the insulation boards, hook in the perforated clip-on profile 9182/2152. Arrange the profile joints offset from each other. The lower parts and perforated clip-on profiles are designed for organic and mineral plaster structures.
Customs tariff number	76042990
Opened label	Purchase only possible as full packaging units.

Item number	Length (cm)	Plaster thickness	Material	Packaging unit
102008	250.00	6 mm	Aluminum natural	20 PCS / 154 BUN

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general. Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!